

ENVIRONMENTAL PRODUCT DECLARATION

COLOREX SD/EC 2.0MM

FORBO FLOORING SYSTEMS

CONDUCTIVE HOMOGENEOUS VINYL FLOOR COVERING



FLOORING SYSTEMS

Colorex is an advanced technical flooring system specifically designed to control static discharge in sensitive areas such as cleanrooms, operation theatres and the electronic industry. Not only does Colorex provide an advanced technical solution, it is also aesthetically pleasing, enhancing any commercial interior from industrial to educational establishments.

Forbo was the first flooring manufacturer to publish a complete Life Cycle Assessment (LCA) report verified by CML in 2000. In addition, Forbo is now publishing Environmental Product Declarations (EPD) for all products including full LCA reports. This EPD uses recognized flooring Product Category Rules and includes additional information to show the impacts on human health and eco-toxicity. By offering the complete story, we hope that our stakeholders will be able to use this document as a tool that will translate the environmental performance of Colorex into true value and benefits for all our customers and stakeholders alike.

For more information visit:
www.forbo-flooring.com





FLOORING SYSTEMS

Colorex SD / EC 2.0 mm
Conductive Homogeneous Vinyl Floor Covering

According to ISO 14025 & EN 15804

This declaration is an environmental product declaration in accordance with ISO 14025. This EPD does not guarantee that any performance benchmarks, including environmental performance benchmarks, are met. EPDs are intended to compliment Type I environmental performance labels. EPDs provide LCA-based information and additional information on the environmental aspects of products and assist purchasers and users to make informed comparisons between products. EPDs are not comparative assertions. EPDs encourage improvement of environmental performance and provide information for assessing the environmental impacts of products over their life cycle. EPDs not based on an LCA covering all life cycle stages, or based on a different PCR, are examples of declarations that have limited comparability. EPDs from different programs may not be comparable.



PROGRAM OPERATOR	UL Environment 333 Pfingsten Road Northbrook, IL 60611
DECLARATION HOLDER	Forbo Flooring B.V. Industrieweg 12 P.O. Box 13 NL-1560 AA Krommenie
DECLARATION NUMBER	12CA64879.113.1
DECLARED PRODUCT	Colorex SD / EC (Conductive Homogeneous Vinyl Floor Covering)
REFERENCE PCR	Flooring: Carpet, Resilient, Laminate, Ceramic, and Wood (NSF 2012)
DATE OF ISSUE	10 July 2013
PERIOD OF VALIDITY	5 Years

CONTENTS OF THE DECLARATION	Product definition and information about building physics Information about basic material and the material's origin Description of the product's manufacture Indication of product processing Information about the in-use conditions Life cycle assessment results Testing results and verifications
-----------------------------	--

The PCR review was conducted by:	NSF International
	Accepted by PCR Review Panel
	ncss@nsf.org
This declaration was independently verified in accordance with ISO 14025 and EN 15804 by Underwriters Laboratories <input type="checkbox"/> INTERNAL <input checked="" type="checkbox"/> EXTERNAL	
	Loretta Tam, ULE EPD Program Manager
This life cycle assessment was independently verified in accordance with ISO 14044, EN 15804 and the reference PCR by:	
	Trisha Montalbo, PE International





FLOORING SYSTEMS

Colorex SD / EC 2.0 mm
Conductive Homogeneous Vinyl Floor Covering

According to ISO 14025 & EN 15804

Product Definition

Product Classification and Description

This declaration covers a wide range of colors. Colorex is an advanced technical flooring system, specifically designed to control static discharge in sensitive areas such as cleanrooms, operating theatres and electronics industry, complying with all the requirements of EN-ISO 10581: Specification for homogeneous floor coverings. Colorex is made basically from PVC which is the most widely used polymer today, pharmaceutical grade plasticizer, used for example for the production of soft PVC medical appliance, in the lowest possible amount among the standard vinyl flooring, very fine and white Calcium Carbonate coming from the marble quarries of Carrara (Italy), conductive water based binder, containing a special carbon black compound, forming the network of conductive veins in the finished tiles.

Colorex is produced by Forbo Flooring for more than 40 years and is sold worldwide. This declaration refers to Colorex SD / EC tiles of 2.0 mm nominal thickness.

Colorex is build up in one homogeneous layer as illustrated in the figure 1.



Figure 1: Colorex Illustration

Range of Applications

Colorex is classified in accordance with EN-ISO 10581 to be installed in the following use areas defined in EN-ISO 10874:

Area of application	2.0 mm thickness
Commercial	Class 34
Industrial	Class 43





Colorex SD / EC 2.0 mm
Conductive Homogeneous Vinyl Floor Covering

According to ISO 14025 & EN 15804

Product Standards

The products considered in this EPD have the following technical specifications:

- o Meets or exceeds all technical requirements in ASTM F 1700 Standard Specification for solid vinyl floor tile
- o Meets or exceeds all technical requirements in EN-ISO 10581 Specification for homogeneous PVC floor covering.



Colorex meets the requirements of EN 14041

EN 13501-1	Reaction to fire	B _{fl} - s1
EN 13893	Slip resistance	DS: ≥ 0.30
EN 1815	Body voltage	< 2 kV
EN 12524	Thermal conductivity	0.28 W/(mK)

Fire Testing:

- o Class 1 when tested in accordance with ASTM E 648/NFPA 253, Standard Test Method for Critical Radiant Flux.
- o Meets 450 or less when tested in accordance with ASTM E 662/NFPA 258, Standard Test Method for Smoke Density
- o Compliant with CHPS 01350 requirements for VOC emissions and indoor air quality.

Accreditations

- o ISO 9001 Quality Management System
- o ISO 14001 Environmental Management System
- o AgBB requirements
- o French act Grenelle A+
- o CHPS section 01350



*Information sur le niveau d'émission de substances volatiles dans l'air intérieur, présentant un risque de toxicité par inhalation, sur une échelle de classe allant de A+ (très faibles émissions) à C (fortes émissions).





FLOORING SYSTEMS

Colorex SD / EC 2.0 mm
Conductive Homogeneous Vinyl Floor Covering

According to ISO 14025 & EN 15804

Delivery Status

Table 1: Specification of delivered product

Characteristics	Nominal Value	Unit
Product thickness	2.0	mm
Product Weight	3200	g/m ²
Tiles dimension	615 x 615	mm

Material Content

Material Content of the Product

Table 2: Composition of Colorex

Component	Material	Availability	Amount [%]	Origin
Binder	PVC	Limited	31	Europe
	DINP	Limited	11	Europe
	PVC Scrap	Postindustrial from Windows frame process	15	Europe
Filler	Calcium carbonate	Abundant mineral	27	Europe
	Reused Colorex		8	Internal
Pigment	Titanium dioxide	Limited mineral	2	Global
	Various other pigments	Limited mineral	2.5	Europe
Processing Aids	Lubricants, Stabilizer, Additives	Limited	1.6	Europe
Chips Coating	Lacquer	Limited	1.9	Europe

Production of Main Materials

PVC : Polymer which is produced by the polymerisation of vinyl chloride monomer.

Plasticizer : A most widely used plasticizer today (DINP) free from restriction by EU decision, obtained by esterifying organic acid and alcohol

Windows frames scrap: Postindustrial PVC from the window industry, which is milled into scrap.

Calcium carbonate : An abundant mineral found in all parts of the world as the chief substance in rocks (i.e., marble and limestone). It can be ground to varying particle sizes and is widely used as filler.

Reused Colorex : Waste material coming from the Colorex production which is reused.

Titanium dioxide : A white pigment produced from the mineral rutile, a naturally occurring form of titanium dioxide. The production of the pigment is a large-scale chemical process

Various other pigments : The vast majority of the used color pigments are iron oxide based.

Chips Coating: A carbon black binder (waters base solution), forming the characteristic, conductive black veins in the final product.





FLOORING SYSTEMS

Colorex SD / EC 2.0 mm
Conductive Homogeneous Vinyl Floor Covering

According to ISO 14025 & EN 15804

Production of the Floor Covering

Colorex Production process

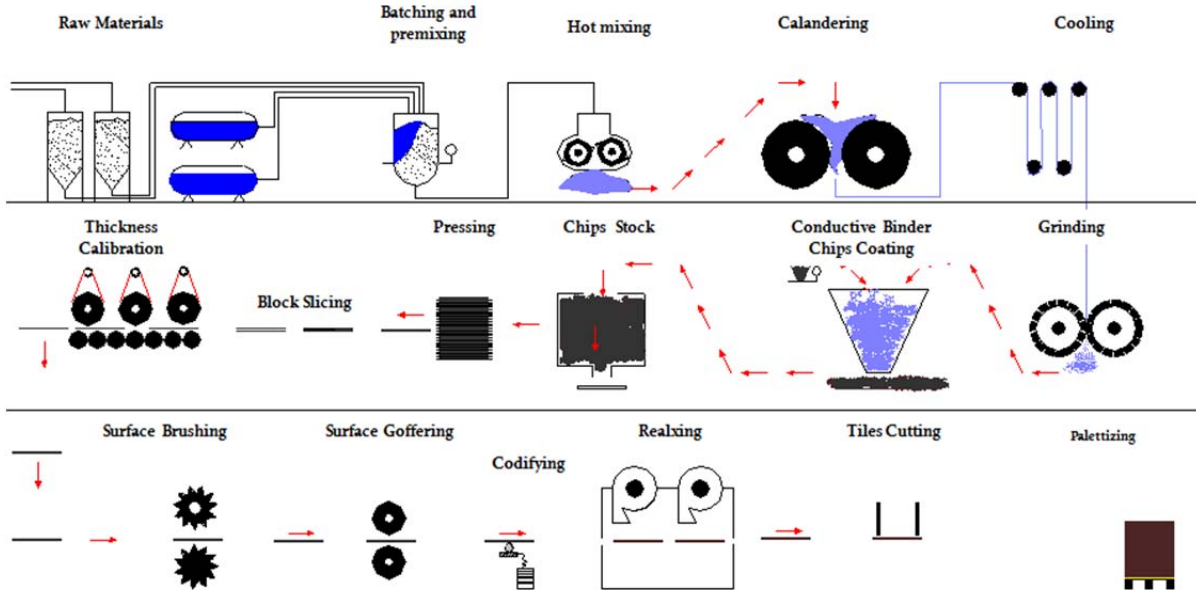


Figure 2: Illustration of the Production process

Colorex is produced starting with a neutral premix with: PVC, Plasticizer, Process Aids, Filler and Titanium dioxide mixed together in a horizontal mixer . A portion of this premix is transferred in a heated mixing system adding pigments, reused waste (if applicable), post-industrial scrap and colored chips (made before, with the same process). At the end of the mixing process, a hot (190 °C) colored soft mass is obtained. The mass is fed directly into the calender obtaining a hot vinyl sheet which is gradually brought to room temperature. The solid vinyl sheet is milled into tiny square pieces, 10 x 10 mm, called "chips". The chips are coated with a conductive coating. This coating will later be the path for the drainage of electrostatic charges. After a drying process, the coated chips are placed into steel moulds and pressed in as static press for 30 minutes at 160 °C. As the blocks are still hot (110 °C), they are sliced horizontally into tiles obtaining a perfectly homogeneous structure. After slicing, the surface of the tiles is grinded, brushed and polished to obtain a perfectly smooth and pore-free surface. This will ease maintenance, cleaning and disinfection in hygiene critical areas. In order to release any internal stresses and thus ensure a perfect dimensional stability, the tiles are relaxed in a tempering oven prior to final cutting to size and automatically stacked on pallets, ready for delivery. Residual material from pressing , grinding, cutting and rejected products are reused

Health, Safety and Environmental Aspects during Production

- o ISO 14001 Environmental Management System





FLOORING SYSTEMS

Colorex SD / EC 2.0 mm
Conductive Homogeneous Vinyl Floor Covering

According to ISO 14025 & EN 15804

Production Waste

Residual material from pressing, grinding, cutting and rejected products are reused. Packaging materials are collected separately and externally recycled.

Delivery and Installation of the Floor Covering

Delivery

A worldwide distribution by truck and container ship is considered. On average every square meter of Colorex is transported as follows:

- | | |
|--|---------|
| ○ Transport distance 40 t truck | 400 km |
| ○ Transport distance 7.5t truck (Fine distribution) | 300 km |
| ○ Capacity utilization trucks (including empty runs) | 85 % |
| ○ Transport distance Ocean ship | 1250 km |
| ○ Capacity utilization Ocean ship | 48 % |

Installation

Because of the specific techniques used during the installation of Colorex 1.2% of the material is cut off as installation waste. For installation of Colorex 0.220 kg/m² of adhesive is required. Waste during the installation process may be recycled as floor covering through the manufacturers' facilities or thermally recycled in a waste incineration plant.

Health, Safety and Environmental Aspects during Installation

Forbo flooring recommends to use (low) zero emission adhesives for installing Colorex.

Waste

Waste during the installation process may be recycled as floor covering through the manufacturers' facilities or thermally recycled in a waste incineration plant.

Packaging

Wooden case, carton boxes, cardboard packaging can be collected separately and should be used in a local recycling process. In the calculation model 100% incineration is taken into account for which there is a credit received.

Use stage

The service lifetime of a floor covering for a certain application on a floor is too widespread to give one common number. For this EPD model the reference service lifetime (RSL) is set to one year. This means that all impacts for the use phase are based on the cleaning and maintenance model for one year. Depending on the area of use, the technical lifetime advised by the manufacturer and the estimated time on the floor by the customer, the service lifetime can be determined. The use phase impacts should be calculated with the foreseen service life to arrive at the total environmental impact.



Colorex SD / EC 2.0 mm
Conductive Homogeneous Vinyl Floor Covering

According to ISO 14025 & EN 15804

Cleaning and Maintenance

Level of use	Cleaning Process	Cleaning Frequency	Consumption of energy and resources
Commercial/Residential/Industrial	Vacuuming	Twice a week	Electricity
	Damp mopping	Once a week	Hot water Neutral detergent

For the calculations the following cleaning regime is considered:

- Dry cleaning with a 1.5 kW vacuum cleaner for 0.21 min/m², twice a week. This equates to 0.55 kWh/m²*year.
- Once a week wet cleaning with 0.062 l/m² water and 0.0008 kg/m² detergent. This result in the use of 3.224 l/m²*year water and 0.04 kg/m²*year detergent. The wet cleaning takes place without power machine usage. Waste water treatment of the arising waste water from cleaning is considered.

The cleaning regime that is recommended in practice will be highly dependent on the use of the premises where the floor covering is installed. In high traffic areas more frequent cleaning will be needed compared to areas where there is low traffic. The use of an entrance mat of at least four steps will reduce the cleaning frequency.

The cleaning regime used in the calculations is suitable for high traffic areas.

Prevention of Structural Damage

All newly laid floor covering should be covered and protected with a suitable non-staining protective covering if other building activities are still in progress. Use protective feet on chairs and tables to reduce scratching. Castor wheels should be suitable for resilient floor coverings.

Health Aspects during Usage

Colorex complies with:

- o AgBB requirements
- o French act Grenelle: A+
- o CHPS section 01350

End of Life

The deconstruction of installed Colorex from the floor is done mechanically and the electrical energy needed for this is estimated to be 0.03 kWh/sqm. This amount of energy is taken into account for the calculations. For the end of life stage, 40% land fill and 60% incineration is taken into account, on average 200 km of transport by truck is included in the calculations.





FLOORING SYSTEMS

Colorex SD / EC 2.0 mm
Conductive Homogeneous Vinyl Floor Covering

According to ISO 14025 & EN 15804

Life Cycle Assessment

A full Life Cycle Assessment has been carried out according to ISO 14040 and ISO 14044.

The following Life Cycle Stages are assessed :

- Production Stage (Raw material acquisition, transportation to Manufacturing and Manufacturing)
- Transport Gate to User
- Installation Stage
- Use Stage
- End of Life Stage

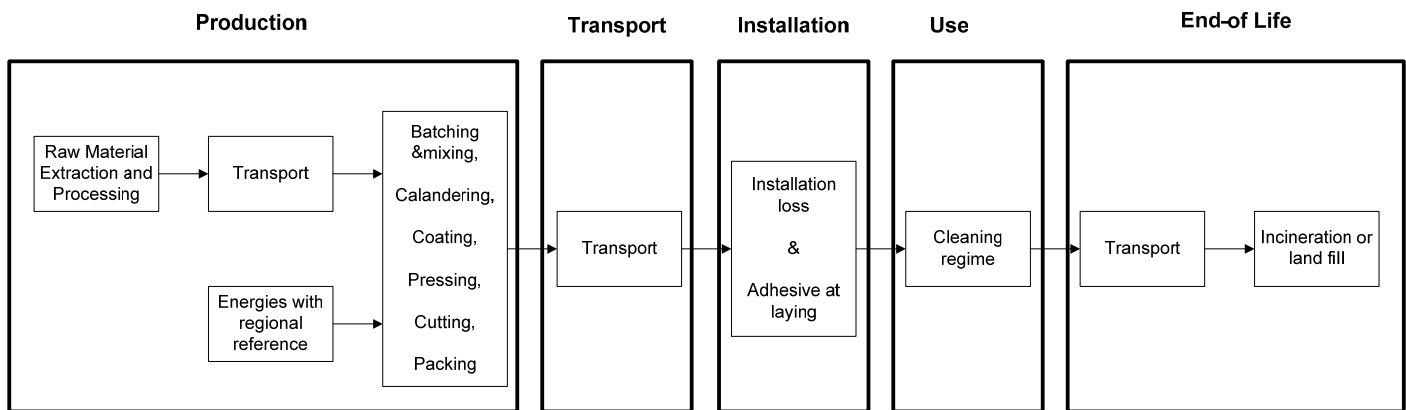


Figure 3: Flow chart of the Life Cycle Assessment

Description of the Declared Functional Unit

The functional unit is one square meter of installed product and the use stage is considered for one year of service life.

Cut off Criteria

The cut-off criteria shall be 1% of renewable and non-renewable primary energy usage and 1% of the total mass of the unit process. The total neglected input flows per module shall be a maximum of 5% of energy usage and mass.

In practice, in this assessment, all data from the production data acquisition are considered, i.e. all raw materials used as per formulation, use of water, electricity and other fuels, the required packaging materials, and all direct production waste. Transport data on all considered inputs and output material are also considered.

Allocations

In the present study some allocations have been made. Detailed explanations can be found in the chapters below.

Co-product allocation

No co-product allocation occurs in the product system.





FLOORING SYSTEMS

Colorex SD / EC 2.0 mm
Conductive Homogeneous Vinyl Floor Covering

According to ISO 14025 & EN 15804

Allocation of multi-input processes

The Production and End of Life stage include incineration plants. In these processes different products are treated together within a process. The allocation procedures followed in these cases are based on a physical classification of the mass flows or calorific values.

Credits from energy substitution are allocated to the production stage, because the gained energy from energy substitution is lower than the energy input in this stage. The same quality of energy is considered.

Allocation procedure of reuse, recycling and recovery

The installation waste and end of life waste is fed into incineration processes. Incineration processes include cogeneration processes which give thermal and power energy as outputs. It is assumed that this recovered energy offsets that produced by the European average grid mix and thermal energy generation from natural gas.

Description of the allocation processes in the LCA report

The description of allocation rules in of this LCA report meets the requirements of the PCR.

Background Data

As a general rule, specific data derived from specific production processes or average data derived from specific production processes have been used as the first choice as a basis for calculating an EPD.

For life cycle modeling of the considered products, the GaBi 6 Software System for Life Cycle Engineering, developed by PE INTERNATIONAL AG has been used. All relevant LCA datasets are taken from the GaBi 6 software database. The datasets from the database GaBi are documented in the online documentation. To ensure comparability of results in the LCA, the basic data of GaBi database were used for energy, transportation and auxiliary materials.

Data Quality

The requirements for data quality and LCA data correspond to the specifications of the PCR.

Foreground data are based on 1 year averaged data (year 2012). The reference ages of LCA datasets vary but are given in the table in the Appendix. The time period over which inputs to and outputs from the system is accounted for is 100 years from the year for which the data set is deemed representative. The technological LCA of the collected data reflects the physical reality of the declared product. The datasets are complete, conform to the system boundaries and the criteria for the exclusion of inputs and outputs and are geographical representative for the supply chain of Forbo flooring.

For life cycle modeling of the considered products the GaBi 6 Software System for Life Cycle Engineering, developed by PE INTERNATIONAL AG, is used. All relevant LCA datasets are taken from the GaBi 6 software database. The last revision of the used data sets took place within the last 10 years.

System Boundaries

Production Stage includes provision of all materials, products and energy, packaging processing and its transport, as well as waste processing up to the end-of waste state or disposal of final residues during the product stage.

Transport and Installation Stage includes provision of all materials, products and energy, as well as waste processing up to the end-of-waste state or disposal of final residues during the construction stage. These information modules also include all impacts and aspects related to any losses during this construction stage (i.e. production, transport, and waste processing and disposal of the lost products and materials). For the transportation a worldwide distribution is considered.



FLOORING SYSTEMS

Colorex SD / EC 2.0 mm
Conductive Homogeneous Vinyl Floor Covering

According to ISO 14025 & EN 15804

Use Stage includes provision and transport of all materials, products and related energy and water use, as well as waste processing up to the end-of-waste state or disposal of final residues during this part of the use stage. These information modules also include all impacts and aspects related to the losses during this part of the use stage (i.e. production, transport, and waste processing and disposal of the lost products and materials).

End of Life Stage includes provision and all transports, provision of all materials, products and related energy and water use. It also includes any declared benefits and loads from net flows leaving the product system that have not been allocated as co-products and that have passed the end-of-waste state in the form of reuse, recovery and/or recycling potentials.

Power mix

The selection of LCA data for the electricity generation is in line with the PCR.

The products are manufactured in Giubiasco, Switzerland. The GaBi 6 Hydropower dataset has therefore been used (reference year 2009). The energy supplier is providing Forbo with a certificate every year.

CO₂-Certificates

No CO₂-certificates are considered in this study.

Life Cycle Inventory Analysis

The total primary energy for one square meter installed Colorex is presented in table 3 with their specific energy resources.

Table 3: Primary energy for all life cycle stages for Colorex for one year

Non-renewable primary energy by resources	Unit	Total Life cycle (MJ)	Total Life cycle (%)	Production	Transport	Installation	Use (1 yr)	End of Life
Total non-renewable primary energy	MJ	159.23	100%	143.74	2.19	8.55	5.84	-1.09
Crude oil	MJ	63.01	39.6%	54.1	2.01	3.43	0.63	2.84
Hard coal	MJ	10.84	6.8%	7.92	0.01	0.11	0.98	1.83
Lignite	MJ	7.97	5.0%	6.13	0.0	0.16	0.74	0.93
Natural gas	MJ	65.27	41.0%	66.11	0.16	4.84	1.74	-7.58
Uranium	MJ	12.12	7.6%	9.47	0.01	0.02	1.74	0.89
Renewable primary energy by resources	Unit	Total Life cycle (MJ)	Total Life cycle (%)	Production	Transport	Installation	Use (1 yr)	End of Life
Total renewable primary energy	MJ	24.44	100%	23.72	0.06	0.07	0.79	-0.20
Geothermal	MJ	0.03	0.1%	0.01	0.0	0	0.01	0.0
Hydro power	MJ	16.36	66.9%	16.07	0.0	-0.02	0.32	-0.01
Solar energy	MJ	6.37	26.1%	6.09	0.05	0.06	0.23	-0.06
Wind power	MJ	1.66	6.8%	1.52	0.0	0.03	0.23	-0.13

The total amount of renewable and non-renewable primary energy is predominated by the production stage for a one year usage; within the production stage the main contributors are the raw material production and energy generation.





FLOORING SYSTEMS

Colorex SD / EC 2.0 mm
Conductive Homogeneous Vinyl Floor Covering

According to ISO 14025 & EN 15804

Waste and non-renewable resource consumption

In table 4 the non-renewable resource consumption and waste production are shown for all life cycle stages for a one year usage.

Table 4: Waste categories and non-renewable resources for Colorex (one year)

Wastes	Unit	Total Life cycle	Production	Transport	Installation	Use (1yr)	End of Life
Hazardous waste	[kg]	5.39E-03	2.36E-03	0.00E+00	3.03E-03	0.00E+00	0.00E+00
Non-hazardous waste	[kg]	1.27E+01	1.01E+01	6.81E-03	4.24E-01	1.12E+00	1.05E+00
Radioactive waste	[kg]	5.14E-03	3.85E-03	2.98E-06	1.29E-04	7.12E-04	4.47E-04
Resources	Unit	Total Life cycle	Production	Transport	Installation	Use (1yr)	End of Life
Nonrenewable resources	[kg]	17.49	12.57	0.01	0.3	1.13	3.47

Life Cycle Assessment

In table 5 the environmental impacts for one lifecycle are presented for Colorex. In table 6 the environmental impacts are presented for all the lifecycle stages.

Table 5: Results of the LCA – Environmental impacts one lifecycle (one year) – Colorex

Impact Category : CML 2001 – Nov. 2010	Colorex	Unit
Global Warming Potential (GWP 100 years)	1.03E+01	kg CO2-Equiv.
Ozone Layer Depletion Potential (ODP, steady state)	1.16E-07	kg R11-Equiv.
Acidification Potential (AP)	3.51E-02	kg SO2-Equiv.
Eutrophication Potential (EP)	2.35E-03	kg Phosphate-Equiv.
Photochem. Ozone Creation Potential (POCP)	1.01E-02	kg Ethene-Equiv.
Abiotic Depletion Potential Elements (ADPE)	2.87E-05	kg Sb-Equiv.
Abiotic Depletion Potential Fossil (ADPF)	1.58E+02	[MJ]

Table 6: Results of the LCA – Environmental impact for Colorex (one year)

Impact Category : CML 2001 – Nov. 2010	Unit	Production	Transport	Installation	Use (1yr)	End of Life
Global Warming Potential	kg CO2-Equiv.	5.50E+00	2.59E-01	5.45E-01	3.22E-01	3.64E+00
Ozone Layer Depletion Potential	kg R11-Equiv.	2.34E-08	2.29E-12	4.21E-10	2.30E-09	9.00E-08
Acidification Potential	kg SO2-Equiv.	2.77E-02	2.27E-03	9.34E-04	1.35E-03	2.84E-03
Eutrophication Potential	kg PSO4-Equiv.	1.66E-03	2.83E-04	1.15E-04	8.29E-05	2.10E-04
Photochem. Ozone Creation Potential	kg Ethene-Equiv.	9.56E-03	-3.70E-05	2.04E-04	9.17E-05	2.43E-04
Abiotic Depletion Elements	kg Sb-Equiv.	2.55E-05	5.41E-09	1.33E-07	6.36E-08	3.03E-06
Abiotic Depletion Fossil	MJ	1.43E+02	2.19E+00	8.55E+00	5.78E+00	-1.51E+00






FLOORING SYSTEMS

Colorex SD / EC 2.0 mm
Conductive Homogeneous Vinyl Floor Covering

According to ISO 14025 & EN 15804

The relative contribution of each process stage to each impact category for Colorex is shown in figure 3.

Figure 3: relative contribution of each process stage to each impact category for Colorex for a one year usage.

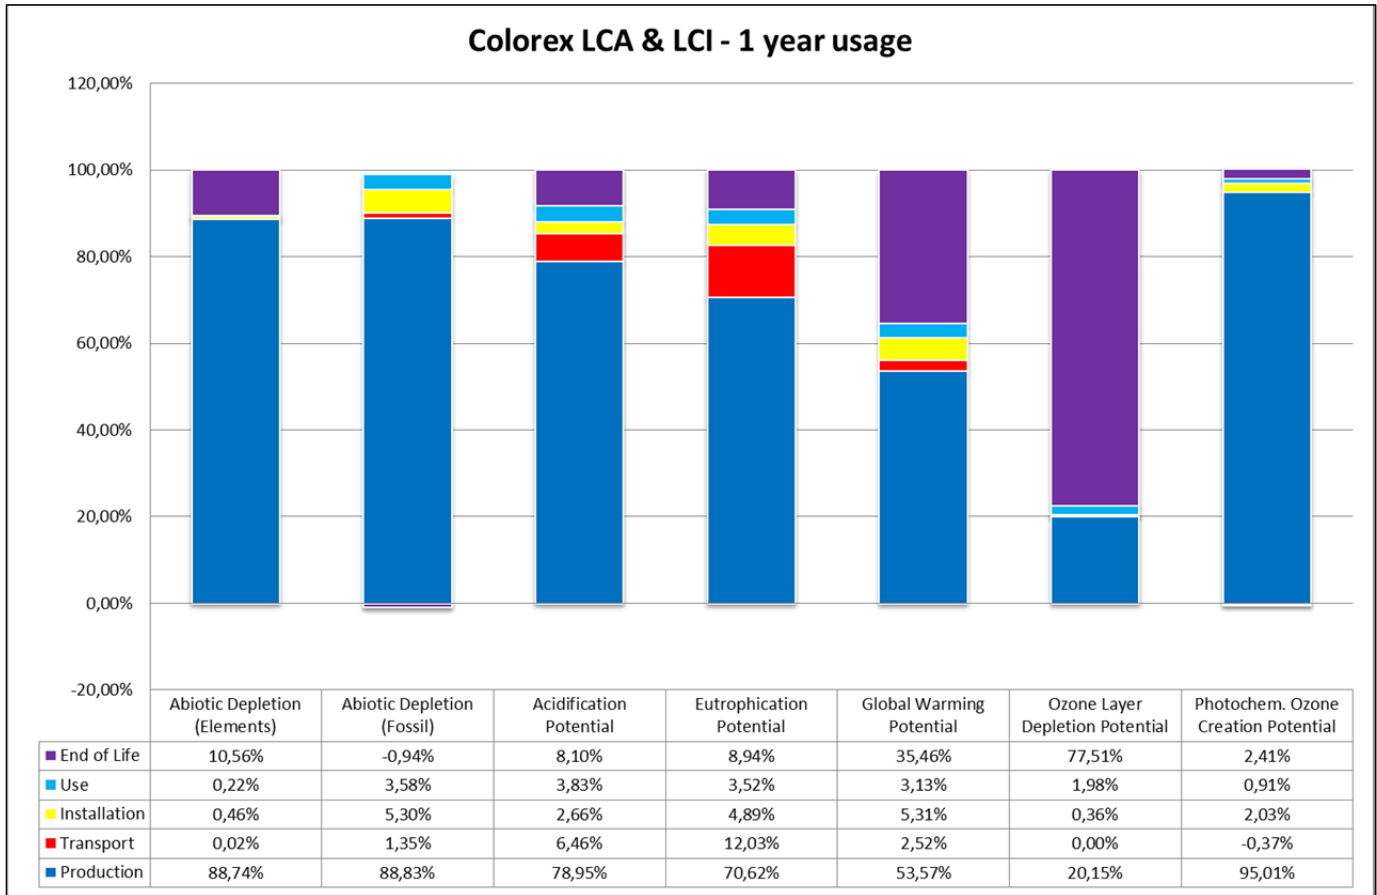

Interpretation

The interpretation of the results has been carried out considering the assumptions and limitations declared in the EPD, both methodology- and data-related for a one year usage.

In most of the impact categories (ADPE, ADPF, AP, EP, GWP and POCP) the production stage has the main contribution to the overall impact. The raw material supply is the key contributor for ADPE, ADPF, AP, EP and GWP with a share of 82 – 99% of the total impact of the production stage. For POCP the Forbo manufacturing is contributing more with a share of 56%, mainly caused by the used energy for the production of Colorex.

Although Forbo declares in the EPD a worldwide distribution by truck (700km) and container ship (1250 km) the transport stage has a very small effect on most of the impacts. Only AP and EP have a significant share which is mainly due to the ocean ship used for transporting the material overseas.

For AP, EP, GWP, POCP, and ADPF the adhesive as main contributor for the flooring installation has a minor impact of 2 - 5% of the total environmental impact of Colorex.

In the Use stage ADPF, AP, EP and GWP have a share between 3 to 4% of the total impacts. This is mainly caused by the electricity needed to vacuum the floor. The cleaning regime used in the calculations is a worst case scenario which





Colorex SD / EC 2.0 mm
Conductive Homogeneous Vinyl Floor Covering

According to ISO 14025 & EN 15804

will be in practice almost always be lower.

Energy recovery from incineration and the respective energy substitution at the end of life results in a small credit for ADPF in the End of Life stage. For AP, EP and ADPE the End of Life stage has an impact of 7 – 10% of the total. This is mainly due to the fact that 60% of the waste at the End of Life stage is considered as being incinerated.

For GWP and in particular ODP the End of Life stage has got a high influence on the total impacts of these impact categories. Also for these two categories this is caused by the incineration of 60% of the waste at the End of Life stage.

Additional Environmental Information

To be fully transparent Forbo Flooring does not only want to declare the environmental impacts required in the PCR, but also the impacts on human health and eco-toxicity. Furthermore the outcome of the calculations according to the European Standard EN15804 are published in this section.

Toxicity

For this calculations the USEtox™ model is used as being the globally recommended preferred model for characterization modelling of human and eco-toxic impacts in LCIA by the United Nations Environment Programme SETAC Life Cycle Initiative.

According to the "ILCD Handbook: Recommendations for Life Cycle Impact Assessment in the European context" the recommended characterization models and associated characterization factors are classified according to their quality into three levels:

- Level I (recommended and satisfactory),
- Level II (recommended but in need of some improvements)
- Level III (recommended, but to be applied with caution).

A mixed classification sometimes is related to the application of the classified method to different types of substances. USEtox™ is classified as Level II / III, unlike for example the CML impact categories which are classified as Level I.

Table 7: Results of the LCA – Environmental impacts one lifecycle (one year) – Colorex

Impact Category : USEtox	Colorex	Unit
Eco toxicity	7.54E-01	PAF m3.day
Human toxicity, cancer	4.15E-09	Cases
Human toxicity, non-canc.	1.24E-06	Cases

In the following table the impacts are subdivided into the lifecycle stages.

Table 8: Results of the LCA – Environmental impact for Colorex (one year)

Impact Category : USEtox	Unit	Production	Transport	Installation	Use (1yr)	End of Life
Eco toxicity	PAF m3.day	7.05E-01	1.37E-02	8.61E-03	2.78E-02	-1.09E-03
Human toxicity, cancer	cases	3.66E-09	5.66E-11	1.64E-10	2.66E-10	1.89E-12
Human toxicity, non-canc.	cases	1.16E-06	2.57E-08	1.15E-08	5.50E-08	-7.67E-09

Interpretation

The interpretation of the results has been carried out considering the assumptions and limitations declared in the EPD, both methodology- and data-related for a one year usage.





FLOORING SYSTEMS

Colorex SD / EC 2.0 mm
Conductive Homogeneous Vinyl Floor Covering

According to ISO 14025 & EN 15804

All the impacts are predominated by the production stage in which the raw materials are having a big impact with a share of around 98%. The main contributors to this are PVC, stabilizer and Titanium dioxide.

Although Forbo declares in the EPD a worldwide distribution by truck (700km) and container ship (1250 km) the transport stage has a very small effect of 1 – 2 % on the total impacts.

In the installation stage the Human toxicity (cancer) is having an impact of 4%, the other two categories have an impact around 1%. This is for 96 – 98% caused by the adhesive used to install the floor.

The Use stage has got a share on the total impacts of 4 – 6.5%, this is mainly caused by the electricity used to vacuum the floor. The cleaning regime used in the calculations is a worst case scenario which will be in practice almost always be lower.

The incineration of 60% of the waste in the End of Life stage is having a negligible impact on these impact categories.

EN15804 Results

In this section the calculations have been conducted and verified according to the requirements of the European Standard EN 15804. In addition, calculations followed the document “Part A: Calculation Rules for the Life Cycle Assessment and Requirements on the Background Report”, however, Part A was not included as a part of the verification.

Table 9: Results of the LCA – Environmental impact for Colorex (one year)

Parameter	Unit	Manufacturing			Installation		Use (1yr)	End of Life			Credits
		A1-3	A4	A5	B2	C2	C3	C4	D		
GWP	[kg CO ₂ -Equiv]	5.50E+00	2.59E-01	6.57E-01	3.22E-01	8.52E-02	3.30E+00	2.58E-01	-1.12E-01		
ODP	[kg CFC11-Equiv]	2.34E-08	2.29E-12	4.63E-10	2.30E-09	1.78E-12	8.57E-08	4.26E-09	-4.22E-11		
AP	[kg SO ₂ -Equiv]	2.77E-02	2.27E-03	1.20E-03	1.35E-03	4.28E-04	2.30E-03	1.16E-04	-2.68E-04		
EP	[kg PO ₄ ³⁻ -Equiv]	1.66E-03	2.83E-04	1.33E-04	8.29E-05	1.03E-04	8.34E-05	2.41E-05	-1.83E-05		
POCP	[kg Ethen Equiv]	9.56E-03	-3.70E-05	2.27E-04	9.17E-05	4.56E-05	1.28E-04	6.94E-05	-2.22E-05		
ADPE	[kg Sb Equiv]	2.55E-05	6.41E-09	1.41E-07	6.36E-08	3.92E-09	3.03E-06	-1.94E-09	-8.80E-09		
ADPF	[MJ]	1.43E+02	2.19E+00	1.04E+01	5.78E+00	1.17E+00	-2.89E+00	2.12E-01	-1.89E+00		

GWP = Global warming potential; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential of land and water; EP = Eutrophication potential; POCP = Formation potential of tropospheric ozone photochemical oxidants; ADPE = Abiotic depletion potential for non-fossil resources; ADPF = Abiotic depletion potential for fossil resources

Table 10: Results of the LCA – Resource use for Colorex (one year)

Parameter	Unit	Manufacturing			Installation		Use (1yr)	End of Life			Credits
		A1-3	A4	A5	B2	C2	C3	C4	D		
PERE	[MJ]	-	-	-	-	-	-	-	-		
PERM	[MJ]	-	-	-	-	-	-	-	-		
PERT	[MJ]	2.37E+01	5.77E-02	2.08E-01	7.88E-01	6.91E-02	-2.28E-01	-3.63E-02	-1.37E-01		
PENRE	[MJ]	-	-	-	-	-	-	-	-		
PENRM	[MJ]	-	-	-	-	-	-	-	-		
PENRT	[MJ]	1.44E+02	2.19E+00	1.04E+01	5.84E+00	1.17E+00	-2.50E+00	2.42E-01	-1.89E+00		
SM	[kg]	6.49E-02	-	-	-	-	-	-	-		
RSF	[MJ]	4.24E-03	1.35E-05	2.35E-04	9.54E-05	8.68E-06	-1.72E-04	-8.18E-06	-2.64E-05		
NRSF	[MJ]	4.44E-02	1.41E-04	2.45E-03	9.99E-04	9.07E-05	-1.80E-03	-8.57E-05	-2.76E-04		
FW	[kg]	4.98E+01	7.85E-02	2.53E+00	5.28E+00	6.66E-02	-2.57E+00	-9.33E-01	-3.86E-01		

PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of nonrenewable primary energy excluding nonrenewable primary energy resources used as raw materials; PENRM = Use of nonrenewable primary energy resources used as raw materials; PENRT = Total use of nonrenewable primary energy resources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of nonrenewable secondary fuels; FW = Use of net fresh water





FLOORING SYSTEMS

Colorex SD / EC 2.0 mm
Conductive Homogeneous Vinyl Floor Covering

According to ISO 14025 & EN 15804

Table 11: Results of the LCA – Output flows and Waste categories for Colorex (one year)

Parameter	Unit	Manufacturing	Transport	Installation	Use (1yr)	End of Life/credits			
		A1-3	A4	A5	B2	C2	C3	C4	D
HWD	[kg]	2.36E-03	0.00E+00	3.03E-03	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
NHWD	[kg]	1.01E+01	6.81E-03	4.24E-01	1.12E+00	7.22E-03	1.26E+00	-2.93E-02	-1.87E-01
RWD	[kg]	3.85E-03	2.98E-06	1.29E-04	7.12E-04	1.67E-06	2.85E-04	3.95E-05	1.21E-04
CRU	[kg]	-	-	-	-	-	-	-	-
MFR	[kg]	-	-	-	-	-	-	-	-
MER	[kg]	-	-	-	-	-	3.38E+00	-	-
EE Power	[MJ]	-	-	1.15E-03	-	-	1.52E+00	-	-
EE Thermal energy	[MJ]	-	-	0.00E+00	-	-	1.22E+01	-	-

HWD = Hazardous waste disposed; NHWD = Nonhazardous waste disposed; RWD = Radioactive waste disposed; CRU = Components for re-use; MFR = Materials for recycling; MER = Materials for energy recovery; EE = Exported energy per energy carrier

Interpretation

The interpretation of the environmental impacts calculated according to EN 15804 are similar to the interpretation according to ISO 14025. A more detailed interpretation is published in the appendix.





FLOORING SYSTEMS

Colorex SD / EC 2.0 mm
Conductive Homogeneous Vinyl Floor Covering

According to ISO 14025 & EN 15804

References

GABI 5 2012	PE INTERNATIONAL AG; GaBi 5: Software-System and Database for Life Cycle Engineering. Copyright, TM. Stuttgart, Echterdingen, 1992-2012.
GABI 5 2012D	GaBi 5: Documentation of GaBi 5: Software-System and Database for Life Cycle Engineering. Copyright, TM. Stuttgart, Echterdingen, 1992-2012. http://documentation.gabi-software.com/
NSF International May 22, 2012 UL ENVIRONMENT ERFMI 2008	Product Category Rule for Environmental Product Declarations <i>Flooring: Carpet, Resilient, Laminate, Ceramic, Wood</i> UL Environment's Program Operator Rules Final report: LCA, Environmental Information Sheet and Ecodesign Model of Resilient Flooring by order of ERFMI, PE International, 2008
IBU 2011	PCR - Part A: Calculation rules for the Life Cycle Assessment and Requirements on the Background Report, Institut Bauen und Umwelt e.V.
PE 2012 ILCD Handbook: General guide for Life Cycle Assessment - Detailed guidance	Description of Selected Impact Categories, PE International AG, 2012 European Commission - Joint Research Centre - Institute for Environment and Sustainability: International Reference Life Cycle Data System (ILCD) Handbook - General guide for Life Cycle Assessment - Detailed guidance. First edition March 2010. EUR 24708 EN. Luxembourg. Publications Office of the European Union; 2010
STANDARDS AND LAWS DIN EN ISO 14044	Environmental management - Life cycle assessment - Requirements and guidelines (ISO 14044:2006); German and English version EN ISO 14044
ISO 14025 2006	DIN EN ISO 14025: Environmental labels and declarations — Type III environmental declarations — Principles and procedures
ISO 14040 2006	Environmental management - Life cycle assessment - Principles and framework (ISO 14040); German and English version EN ISO 14040
CEN/TR 15941	Sustainability of construction works - Environmental product declarations - Methodology for selection and use of generic data; German version CEN/TR 15941
EN 15804	EN 15804: Sustainability of construction works — Environmental Product Declarations — Core rules for the product category of construction products
ISO 24011 CPR	Resilient floor coverings - Specification for plain and decorative linoleum REGULATION (EU) No 305/2011 OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL of 9 March 2011 laying down harmonised conditions for the marketing of construction products and repealing Council Directive 89/106/EEC
EN-ISO 10874	Resilient, textile and laminate floor coverings - Classification

ENVIRONMENTAL PRODUCT DECLARATION



FLOORING SYSTEMS

Colorex SD / EC 2.0 mm
Conductive Homogeneous Vinyl Floor Covering

According to ISO 14025 & EN 15804

Appendix

The following life cycle assessment study of the company Forbo Flooring, a manufacturer of resilient floor coverings, has been performed by Forbo Flooring under support of PE International and has been conducted according to the requirements of the European Standard **/Error! Reference source not found./** following the document "Part A: Calculation Rules for the Life Cycle Assessment and Requirements on the Background Report" /IBU 2011/.





FLOORING SYSTEMS

Colorex SD / EC 2.0 mm
Conductive Homogeneous Vinyl Floor Covering

According to ISO 14025 & EN 15804

LCA Report for Environmental Product Declarations (EPD)

Colorex SD/EC Tiles



FLOORING SYSTEMS

Forbo Flooring

Title of the study:

Environmental product declarations of Colorex SD/EC Tiles

Part of the project: Life Cycle assessment (LCA)

LCA study conducted by:

Forbo Flooring

Industrieweg 12

1566 JP Assendelft

The Netherlands

July 2013

Supported by:

PE INTERNATIONAL AG





FLOORING SYSTEMS

Colorex SD / EC 2.0 mm
Conductive Homogeneous Vinyl Floor Covering

According to ISO 14025 & EN 15804

Authors:

Floris Zeitler, Forbo
Supported by Peter Shonfield, Julia Goerke

Forbo Flooring BV
Industrieweg 12
1566 JP Assendelft, The Netherlands
Tel. +31 (0) 75 6477477
Fax +31 (0) 75 6477707
E-mail floris.zeitler@forbo.com
Internet www.forbo-flooring.com

Supported by:
PE INTERNATIONAL AG
Hauptstraße 111 – 115
D – 70771 Leinfelden – Echterdingen
Tel. +49 (0) 711 34 18 17 – 0
Fax +49 (0) 711 34 18 17 – 25
E-mail info@pe-international.com
Internet www.pe-international.com

Nomenclature

Abbreviation	Explanation
ADP	Abiotic Depletion Potential
AP	Acidification Potential
BLBSB	Benefits and Loads Beyond the System Boundary
CRU	Components for re-use
EE	Exported energy per energy carrier
EP	Eutrophication Potential
EPD	Environmental Product Declaration
FW	Use of net fresh water
GWP	Global Warming Potential
HWD	Hazardous waste disposed
LCA	Life Cycle Assessment
MER	Materials for energy recovery
MFR	Materials for recycling
NRSF	Use of non-renewable secondary fuels
ODP	Ozone Layer Depletion Potential
PENRE	Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials
PENRM	Use of non-renewable primary energy resources used as raw materials
PENRT	Total use of non-renewable primary energy resources
PERE	Use of renewable primary energy excluding renewable primary energy resources used as raw materials
PERM	Use of renewable primary energy resources used as raw materials
PERT	Total use of renewable primary energy resources
PCR	Product Category Rules
POCP	Photochemical Ozone Creation Potential
RSF	Use of renewable secondary fuels
RSL	Reference Service Life
RWD	Radioactive waste disposed
SM	Use of secondary material





FLOORING SYSTEMS

Colorex SD / EC 2.0 mm
Conductive Homogeneous Vinyl Floor Covering

According to ISO 14025 & EN 15804

General

The present LCA study of the company Forbo Flooring, a manufacturer of resilient floor coverings, has been performed by Forbo Flooring under support of PE International and has been conducted according to the requirements of the European Standard EN15804 following the document "Part A: Calculation Rules for the Life Cycle Assessment and Requirements on the Background Report". The LCA report was sent to verification on 07/05/13.

Scope

This document is the LCA report for the "Environmental Product Declaration" (EPD) of "Colorex EC/SD Tiles".

The provision of an LCA report is required for each EPD of the EPD-program holder (UL Environment). This document shows how the calculation rules were applied and describes additional LCA information on the Life Cycle Assessment in accordance with the requirements of ISO 14040 series.

Content, structure and accessibility of the LCA report

The LCA report provides a systematic and comprehensive summary of the project documentation supporting the verification of an EPD.

The report documents the information on which the Life Cycle Assessment is based, while also ensuring the additional information contained within the EPD complies with the requirements of ISO 14040 series.

The LCA report contains all of the data and information of importance for the details published in the EPD. Care is given to all explanations as to how the data and information declared in the EPD arises from the Life Cycle Assessment.

The verification of the EPD is aligned towards the structure of the rule document based on ISO 14025 and EN15804.

Goal of the study

The reason for performing this LCA study is to publish an EPD based on EN 15804 and ISO 14025. This study contains the calculation and interpretation of the LCA results for Colorex complying with EN-ISO 11638 : Resilient floor coverings – Heterogeneous polyvinyl chloride flooring on foam - Specification.

Manufactured by:
Forbo-Giubiasco SA
via Industrie 16
CH-6512 Giubiasco
Switzerland

The following life cycle stages were considered:

- Product stage
- Transport stage
- Installation stage
- Use stage
- End-of-life stage
- Benefits and loads beyond the product system boundary

The main purpose of EPD is for use in business-to-business communication. As all EPD are publicly available on the website of UL Environment and therefore are accessible to the end consumer they can also be used in business-to-consumer communication.

The intended use of the EPD is to communicate environmentally related information and LCA results to support the assessment of the sustainable use of resources and of the impact of construction works on the environment



FLOORING SYSTEMS

Colorex SD / EC 2.0 mm
Conductive Homogeneous Vinyl Floor Covering

According to ISO 14025 & EN 15804

Scope of the study

Declared / functional unit

The declaration refers to the declared/functional unit of 1m² installed flooring product.

Declaration of construction products classes

The LCA report refers to a manufacturer declaration of type 1a): Declaration of a specific product from a manufacturer's plant. Colorex EC/SD tile is produced at the following manufacturing site:

Forbo-Giubiasco SA
via Industrie 16
CH-6512 Giubiasco
Switzerland

Product Definition

Product Classification and Description

This declaration covers a wide range of colors. Colorex is an advanced technical flooring system, specifically designed to control static discharge in sensitive areas such as cleanrooms, operating theatres and electronics industry, complying with all the requirements of EN-ISO 10581: Specification for homogeneous floor coverings. Colorex is made basically from PVC which is the most widely used polymer today, pharmaceutical grade plasticizer, used for example for the production of soft PVC medical appliance, in the lowest possible amount among the standard vinyl flooring, very fine and white Calcium Carbonate coming from the marble quarries of Carrara (Italy), conductive water based binder, containing a special carbon black compound, forming the network of conductive veins in the finished tiles.

Colorex is produced by Forbo Flooring for more than 40 years and is sold worldwide. This declaration refers to Colorex SD / EC tiles of 2.0 mm nominal thickness.

Colorex is build up in one homogeneous layer as illustrated in the figure 1.



Figure 1: Illustration Colorex

ENVIRONMENTAL PRODUCT DECLARATION





FLOORING SYSTEMS

Colorex SD / EC 2.0 mm
Conductive Homogeneous Vinyl Floor Covering

According to ISO 14025 & EN 15804

Range of Applications

Colorex is classified in accordance with EN-ISO 10581 to be installed in the following use areas defined in EN-ISO 10874:

Area of application	2.0 mm thickness
Commercial	 Class 34
Industrial	 Class 43

Product Standards

The products considered in this EPD have the following technical specifications:

- Meets or exceeds all technical requirements in ASTM F 1700 Standard Specification for solid vinyl floor tile
- Meets or exceeds all technical requirements in EN-ISO 10581 Specification for homogeneous PVC floor covering.



Colorex meets the requirements of EN 14041

EN 13501-1	Reaction to fire	B _n - s1
EN 13893	Slip resistance	DS: ≥ 0.30
EN 1815	Body voltage	< 2 kV
EN 12524	Thermal conductivity	0.28 W/(mK)

Fire Testing:

- Class 1 when tested in accordance with ASTM E 648/NFPA 253, Standard Test Method for Critical Radiant Flux.
- Meets 450 or less when tested in accordance with ASTM E 662/NFPA 258, Standard Test Method for Smoke Density
- Compliant with CHPS 01350 requirements for VOC emissions and indoor air quality.

Accreditations

- ISO 9001 Quality Management System
- ISO 14001 Environmental Management System
- AgBB requirements
- French act Grenelle A+
- CHPS section 01350

Delivery status

Characteristics	Nominal Value	Unit
Product thickness	2.0	mm
Product Weight	3200	g/m ²
Tiles dimension	615 x 615	mm

Environment



ENVIRONMENTAL PRODUCT DECLARATION



FLOORING SYSTEMS

Colorex SD / EC 2.0 mm
Conductive Homogeneous Vinyl Floor Covering

According to ISO 14025 & EN 15804

Material Content

Component	Material	Availability	Mass %	Origin of raw material
Binder	PVC	Industry	31	Europe
	DINP	Industry	11	Europe
	PVC Scrap	Postindustrial from Windows frame process	15	Europe
Filler	Calcium carbonate	Abundant mineral	27	Europe
	Reused Colorex		8	Internal
Pigment	Titanium dioxide	Limited mineral	2	Global
	Various other pigments	Limited mineral	2.5	Europe
Processing Aids	Lubricants, Stabilizer, Additives	Industry	1.6	Europe
Chips Coating	Lacquer	Industry	1.9	Europe

Production of Main Materials

PVC : Polymer which is produced by the polymerisation of vinyl chloride monomer.

Plasticizer : A most widely used plasticizer today (DINP) free from restriction by EU decision, obtained by esterifying organic acid and alcohol

Windows frames scrap: Postindustrial PVC from the window industry, which is milled into scrap.

Calcium carbonate : An abundant mineral found in all parts of the world as the chief substance in rocks (i.e., marble and limestone). It can be ground to varying particle sizes and is widely used as filler.

Reused Colorex : Waste material coming from the Colorex production which is reused.

Titanium dioxide : A white pigment produced from the mineral rutile, a naturally occurring form of titanium dioxide. The production of the pigment is a large-scale chemical process

Various other pigments : The vast majority of the used color pigments are iron oxide based.

Chips Coating: A carbon black binder (waters base solution), forming the characteristic, conductive black veins in the final product.

Production of the Floor Covering

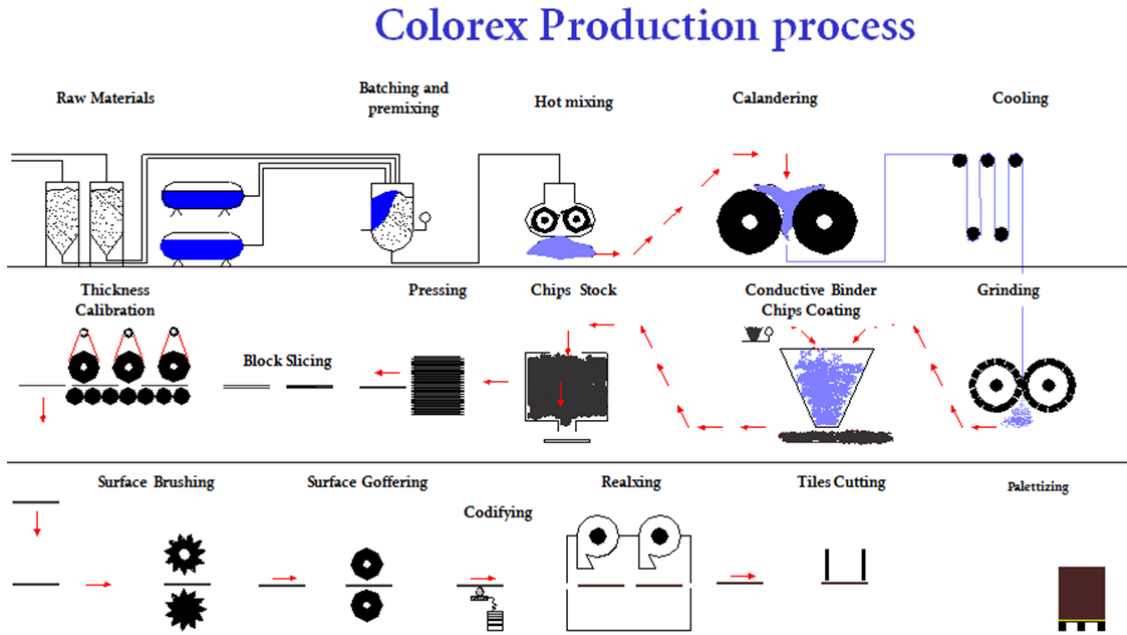


Figure 2: Illustration of the Production process

Colorex is produced starting with a first neutral premix with: PVC, Plasticizer, Process Aids, Filler and Titanium dioxide mixed together in a horizontal mixer. A portion of this premix is transferred in a heated mixing system adding pigments, reused waste (if applicable), post-industrial scrap and colored chips (made before, with the same process). At the end of the mixing process, a hot (190 °C) colored soft mass is obtained. The mass is fed directly into the calender obtaining a hot vinyl sheet which is gradually brought to room temperature. The solid vinyl sheet is milled into tiny square pieces, 10 x 10 mm, called "chips". The chips are coated with a conductive coating. This coating will later be the path for the drainage of electrostatic charges. After a drying process, the coated chips are placed into steel moulds and pressed in as static press for 30 minutes at 160 °C. As the blocks are still hot (110 °C), they are sliced horizontally into tiles obtaining a perfectly homogeneous structure. After slicing, the surface of the tiles is grinded, brushed and polished to obtain a perfectly smooth and pore-free surface. This will ease maintenance, cleaning and disinfection in hygiene critical areas. In order to release any internal stresses and thus ensure a perfect dimensional stability, the tiles are relaxed in a tempering oven prior to final cutting to size and automatically stacked on pallets, ready for delivery. Residual material from pressing, grinding, cutting and rejected products are reused.

Health, Safety and Environmental Aspects during Production

- ISO 14001 Environmental Management System

Production Waste

Residual material from pressing, grinding, cutting and rejected products are reused. Packaging materials are collected separately and externally recycled.



FLOORING SYSTEMS

Colorex SD / EC 2.0 mm
Conductive Homogeneous Vinyl Floor Covering

According to ISO 14025 & EN 15804

Delivery and Installation of the Floor Covering

Delivery

A worldwide distribution by truck and container ship is considered. On average every square meter of Colorex is transported as follows:

- Transport distance 40 t truck 400 km
- Transport distance 7.5t truck (Fine distribution) 300 km
- Capacity utilization trucks (including empty runs) 85 %
- Transport distance Ocean ship 1250 km
- Capacity utilization Ocean ship 48 %

Installation

Because of the specific techniques used during the installation of Colorex 1.2% of the material is cut off as installation waste. For installation of Colorex 0.220 kg/m² of adhesive is required. Waste during the installation process may be recycled as floor covering through the manufacturers' facilities or thermally recycled in a waste incineration plant.

Health, Safety and Environmental Aspects during Installation

Forbo flooring recommends the use of (low) zero emission tackifiers for installation of Colorex.

Waste

Waste during the installation process may be recycled as floor covering through the manufacturers' facilities or thermally recycled in a waste incineration plant.

Packaging

Wooden case, carton boxes, cardboard packaging can be collected separately and should be used in a local recycling process. In the calculation model 100% incineration is taken into account for which there is a credit received.

Use stage

The service lifetime of a floor covering for a certain application on a floor is too widespread to give one common number. For this EPD model the reference service lifetime (RSL) is set to one year. This means that all impacts for the use phase are based on the cleaning and maintenance model for one year. Depending on the area of use, the technical lifetime advised by the manufacturer and the estimated time on the floor by the customer, the service lifetime can be determined. The use phase impacts should be calculated with the foreseen service life to arrive at the total environmental impact.

Cleaning and Maintenance

Level of use	Cleaning Process	Cleaning Frequency	Consumption of energy and resources
Commercial/Residential/Industrial	Vacuuming	Twice a week	Electricity
	Damp mopping	Once a week	Hot water Neutral detergent

For the calculations the following cleaning regime is considered:

- Dry cleaning with a 1.5 kW vacuum cleaner for 0.21 min/m², twice a week. This equates to 0.55 kWh/m²*year.
- Once a week wet cleaning with 0.062 l/m² water and 0.0008 kg/m² detergent. This result in the use of 3.224 l/m²*year water and 0.04 kg/m²*year detergent. The wet cleaning takes place without power machine usage. Waste water treatment of the arising waste water from cleaning is considered.





FLOORING SYSTEMS

Colorex SD / EC 2.0 mm
Conductive Homogeneous Vinyl Floor Covering

According to ISO 14025 & EN 15804

The cleaning regime that is recommended in practice will be highly dependent on the use of the premises where the floor covering is installed. In high traffic areas more frequent cleaning will be needed compared to areas where there is low traffic. The use of an entrance mat of at least four steps will reduce the cleaning frequency.

The cleaning regime used in the calculations is suitable for high traffic areas and is a worst case scenario.

Prevention of Structural Damage

All newly laid floor covering should be covered and protected with a suitable non-staining protective covering if other building activities are still in progress. Use protective feet on chairs and tables to reduce scratching. Castor wheels should be suitable for resilient floor coverings.

Health Aspects during Usage

Colorex complies with:

- AgBB requirements
- French act Grenelle: A+
- CHPS section 01350

End of Life

The deconstruction of installed Colorex from the floor is done mechanically and the electrical energy needed for this is estimated to be 0.03 kWh/sqm. This amount of energy is taken into account for the calculations. For the end of life stage, 40% land fill and 60% incineration is taken into account, on average 200 km of transport by truck is included in the calculations.

Life Cycle Assessment

A full Life Cycle Assessment has been carried out according to ISO 14040 and ISO 14044.

The following Life Cycle Stages are assessed :

- Production Stage (Raw material acquisition, transportation to Manufacturing and Manufacturing)
- Transport Gate to User
- Installation Stage
- Use Stage
- End of Life Stage

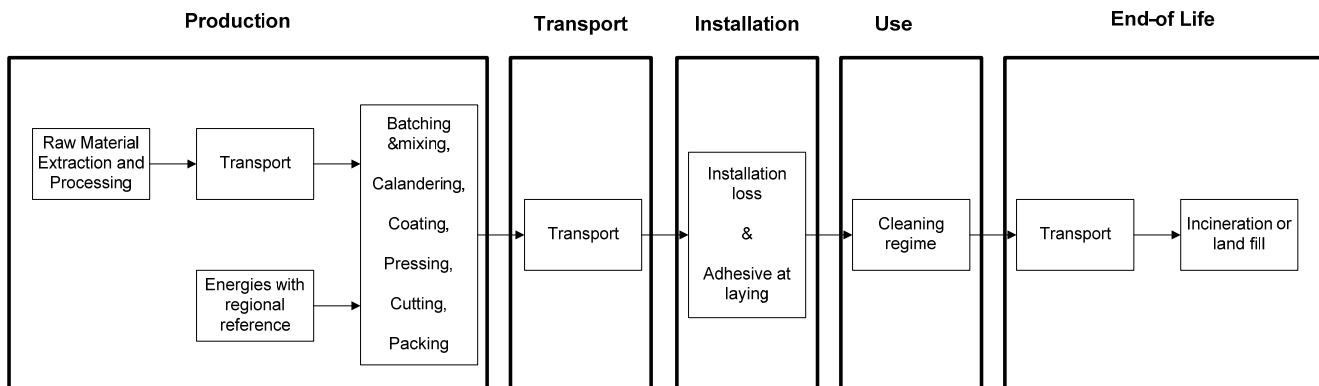


Figure 2 : Flow chart of the Life Cycle Assessment

Description of the declared Functional Unit

The functional unit is one square meter of installed product and the use stage is considered for one year of service life.





FLOORING SYSTEMS

Colorex SD / EC 2.0 mm
Conductive Homogeneous Vinyl Floor Covering

According to ISO 14025 & EN 15804

Cut off Criteria

The cut-off criteria shall be 1% of renewable and non-renewable primary energy usage and 1% of the total mass of the unit process. The total neglected input flows per module shall be a maximum of 5% of energy usage and mass.

In practice, in this assessment, all data from the production data acquisition are considered, i.e. all raw materials used as per formulation, use of water, electricity and other fuels, the required packaging materials, and all direct production waste. Transport data on all considered inputs and output material are also considered.

LCA Data

As a general rule, specific data derived from specific production processes or average data derived from specific production processes have been used as the first choice as a basis for calculating an EPD.

For life cycle modeling of the considered products, the GaBi 6 Software System for Life Cycle Engineering, developed by PE INTERNATIONAL AG, has been used. All relevant LCA datasets are taken from the GaBi 6 software database. The datasets from the database GaBi are documented in the online documentation. To ensure comparability of results in the LCA, the basic data of GaBi database were used for energy, transportation and auxiliary materials.

Data Quality

The requirements for data quality and LCA data correspond to the specifications of the PCR.

Foreground data are based on 1 year averaged data (year 2012). The reference ages of LCA datasets vary but are given in the table in the Appendix. The time period over which inputs to and outputs from the system is accounted for is 100 years from the year for which the data set is deemed representative. The technological LCA of the collected data reflects the physical reality of the declared product. The datasets are complete, conform to the system boundaries and the criteria for the exclusion of inputs and outputs and are geographical representative for the supply chain of Forbo flooring.

For life cycle modeling of the considered products the GaBi 6 Software System for Life Cycle Engineering, developed by PE INTERNATIONAL AG, is used. All relevant LCA datasets are taken from the GaBi 6 software database. The last revision of the used data sets took place within the last 10 years.

Table 1: LCA datasets used in the LCA model

Data set	Region	Reference year
PVC	Germany	2011
DINP	Germany	2010
PVC scrap	Europe	2006
Calcium carbonate	Germany	2011
Reused Colorex	Internal	2006
Titanium dioxide	Europe	2010
Various other pigments	Germany	2010
Lubricants, Stabilizer, Additives	Europe	2010
Lacquer	Germany	2010
Water (desalinated; deionised)	Germany	2010
Detergent (ammonia based)	Germany	2006
Adhesive for resilient flooring	Germany	2010
Waste incineration of Colorex	Europe	2006
Electricity from Hydro power	Switzerland	2009
Power grid mix	Europe	2009
Thermal energy from fuel oil	Switzerland	2009
Thermal energy from natural gas	Europe	2009
Trucks	Global	2010
Municipal waste water treatment (Sludge incineration).	Europe	2011





FLOORING SYSTEMS

Colorex SD / EC 2.0 mm
Conductive Homogeneous Vinyl Floor Covering

According to ISO 14025 & EN 15804

Data set	Region	Reference year
Container ship	Global	2010
Diesel mix at refinery	Europe	2009
Heavy fuel oil at refinery (1.0wt.% S)	Europe	2009
Corrugated board	Europe	2002
Wooden pallets	Germany	1998
PE-film	Europe	2005

The documentation of the LCA data sets can be taken from the GaBi documentation.

System Boundaries

Production Stage includes provision of all materials, products and energy, packaging processing and its transport, as well as waste processing up to the end-of-waste state or disposal of final residues during the product stage.

Transport and Installation Stage includes provision of all materials, products and energy, as well as waste processing up to the end-of-waste state or disposal of final residues during the construction stage. These information modules also include all impacts and aspects related to any losses during this construction stage (i.e. production, transport, and waste processing and disposal of the lost products and materials). For the transportation a worldwide distribution is considered.

Use Stage includes provision and transport of all materials, products and related energy and water use, as well as waste processing up to the end-of-waste state or disposal of final residues during this part of the use stage. These information modules also include all impacts and aspects related to the losses during this part of the use stage (i.e. production, transport, and waste processing and disposal of the lost products and materials).

End of Life Stage includes provision and all transports, provision of all materials, products and related energy and water use. It also includes any declared benefits and loads from net flows leaving the product system that have not been allocated as co-products and that have passed the end-of-waste state in the form of reuse, recovery and/or recycling potentials.

Power mix

The selection of LCA data for the electricity generation is in line with the PCR.

The products are manufactured in Giubiasco, Switzerland. The GaBi 6 Hydro power datasets has therefore been used (reference year 2009). The energy supplier is providing Forbo with a certificate every year.

CO2-Certificates

No CO2-certificates are considered in this study.

Allocations

In the present study some allocations have been made. Detailed explanations can be found in the chapters below.

Co-product allocation

No co-product allocation occurs in the product system.

Allocation of multi-Input processes

The Production and End of Life stage include incineration plants. In these processes different products are treated together within a process. The allocation procedures followed in these cases are based on a physical classification of the mass flows or calorific values.

Credits from energy substitution are allocated to the production stage, because the gained energy from energy substitution is lower than the energy input in this stage. The same quality of energy is considered.

Allocation procedure of reuse, recycling and recovery





FLOORING SYSTEMS

Colorex SD / EC 2.0 mm
Conductive Homogeneous Vinyl Floor Covering

According to ISO 14025 & EN 15804

The installation waste and end of life waste can be fed into incineration processes. Incineration processes include cogeneration processes which give thermal and power energy as outputs. It is assumed that this recovered energy offsets that produced by the European average grid mix and thermal energy generation from natural gas.

Description of the allocation processes in the LCA report

The description of allocation rules in of this LCA report meets the requirements of the PCR.

Description of the unit processes in the LCA report

The modeling of the unit processes reported for the LCA are documented in a transparent way, respecting the confidentiality of the data present in the LCA report.

In the following tables the type and amount of the different input and output flows are listed for 1m² produced flooring; installed flooring includes the material loss during installation (1.2%):

Table 2: Composition of Colorex

Process data	Unit	Project Vinyl
PVC	kg/m ²	0.992
DINP	kg/m ²	0.352
PVC scrap	kg/m ²	0.480
Calcium carbonate	kg/m ²	0.864
Reused Colorex	kg/m ²	0.256
Titanium dioxide	kg/m ²	0.064
Various other pigments	kg/m ²	0.080
Lubricants, Stabilizer, Additives	kg/m ²	0.051
Lacquer	kg/m ²	0.061

Table 3: Production related inputs/outputs

Process data	Unit	Colorex
INPUTS		
Colorex	kg	3.915
Electricity	MJ	12.5
Thermal energy from fuel oil	MJ	12.9
OUTPUTS		
Colorex	kg	3.20
Waste	kg	0.715

Table 4: Packaging requirements (per m² manufactured product)

Process data	Unit	Colorex
Wooden pallets	kg	0.123
Corrugated board	kg	0.030
PE-film	kg	0.009



ENVIRONMENTAL PRODUCT DECLARATION



FLOORING SYSTEMS

Colorex SD / EC 2.0 mm
Conductive Homogeneous Vinyl Floor Covering

According to ISO 14025 & EN 15804

Table 5: Transport distances

Process data	Unit	Road	Truck size	Ship
PVC	km	514		-
DINP	km	501		-
PVC scrap	km	157		-
Calcium carbonate	km	334		-
Reused Colorex	km	0		-
Titanium dioxide	km	790		-
Various other pigments	km	85		-
Lubricants, Stabilizer, Additives	km	86		-
Lacquer	km	836		-
Corrugated board	km	100		-
PE-film	km	100		-
Wooden pallets	km	100		-
Transport to construction site :	km	700		1250
-Transport distance 40 t truck		400	34 - 40 t gross weight / 27t payload capacity	
-Transport distance 7.5t truck (Fine distribution)		300	7,5 t - 12t gross weight / 5t payload capacity	
Waste transport to landfill & incineration	km	200	7,5 t - 12t gross weight / 5t payload capacity	-

Table 6: Inputs/outputs from Installation

Process data	Unit	Colorex
INPUTS		
Colorex	kg	3.20
Adhesive (30% water content)	kg	0.220
o Water		
o Acrylate co-polymer		
o Styrene Butadiene co-polymer		
o Limestone flour		
o Sand		
OUTPUTS		
Installed Colorex	kg	3.16
Installation Waste	kg	0.04

Table 7: Inputs from use stage (per m².year of installed product)

Process data	Unit	Colorex
Detergent	kg/year	0.04
Electricity	kWh/year	0.55
Water	kg/year	3.224

Table 8: Disposal

Process data	Unit	Colorex
Post-consumer Colorex to landfill	%	40
Post-consumer Colorex to incineration	%	60





FLOORING SYSTEMS

Colorex SD / EC 2.0 mm
Conductive Homogeneous Vinyl Floor Covering

According to ISO 14025 & EN 15804

Life Cycle Inventory Analysis

In table 9 the environmental impacts for one lifecycle are presented for Colorex . In the table 10 the environmental impacts are presented for all the lifecycle stages.

Table 9: Results of the LCA – Environmental impacts one lifecycle (one year) – Colorex

Impact Category : CML 2001 – Nov. 2010	Colorex	Unit
Global Warming Potential (GWP 100 years)	1.03E+01	kg CO2-Equiv.
Ozone Layer Depletion Potential (ODP, steady state)	1.16E-07	kg R11-Equiv.
Acidification Potential (AP)	3.51E-02	kg SO2-Equiv.
Eutrophication Potential (EP)	2.35E-03	kg Phosphate-Equiv.
Photochem. Ozone Creation Potential (POCP)	1.01E-02	kg Ethene-Equiv.
Abiotic Depletion Potential Elements (ADPE)	2.87E-05	kg Sb-Equiv.
Abiotic Depletion Potential Fossil (ADPF)	1.58E+02	[MJ]

Table 10: Results of the LCA – Environmental impact for Colorex (one year)

Impact Category : CML 2001 – Nov. 2010	Unit	Production	Transport	Installation	Use (1yr)	End of Life
Global Warming Potential	kg CO2-Equiv.	5.50E+00	2.59E-01	5.45E-01	3.22E-01	3.64E+00
Ozone Layer Depletion Potential	kg R11-Equiv.	2.34E-08	2.29E-12	4.21E-10	2.30E-09	9.00E-08
Acidification Potential	kg SO2-Equiv.	2.77E-02	2.27E-03	9.34E-04	1.35E-03	2.84E-03
Eutrophication Potential	kg PSO4-Equiv.	1.66E-03	2.83E-04	1.15E-04	8.29E-05	2.10E-04
Photochem. Ozone Creation Potential	kg Ethene-Equiv.	9.56E-03	-3.70E-05	2.04E-04	9.17E-05	2.43E-04
Abiotic Depletion Elements	kg Sb-Equiv.	2.55E-05	5.41E-09	1.33E-07	6.36E-08	3.03E-06
Abiotic Depletion Fossil	MJ	1.43E+02	2.19E+00	8.55E+00	5.78E+00	-1.51E+00

The relative contribution of each process stage to each impact category for Colorex is shown in figure 3.






FLOORING SYSTEMS

Colorex SD / EC 2.0 mm
Conductive Homogeneous Vinyl Floor Covering

According to ISO 14025 & EN 15804

Figure 3: relative contribution of each process stage to each impact category for Colorex for a one year usage.

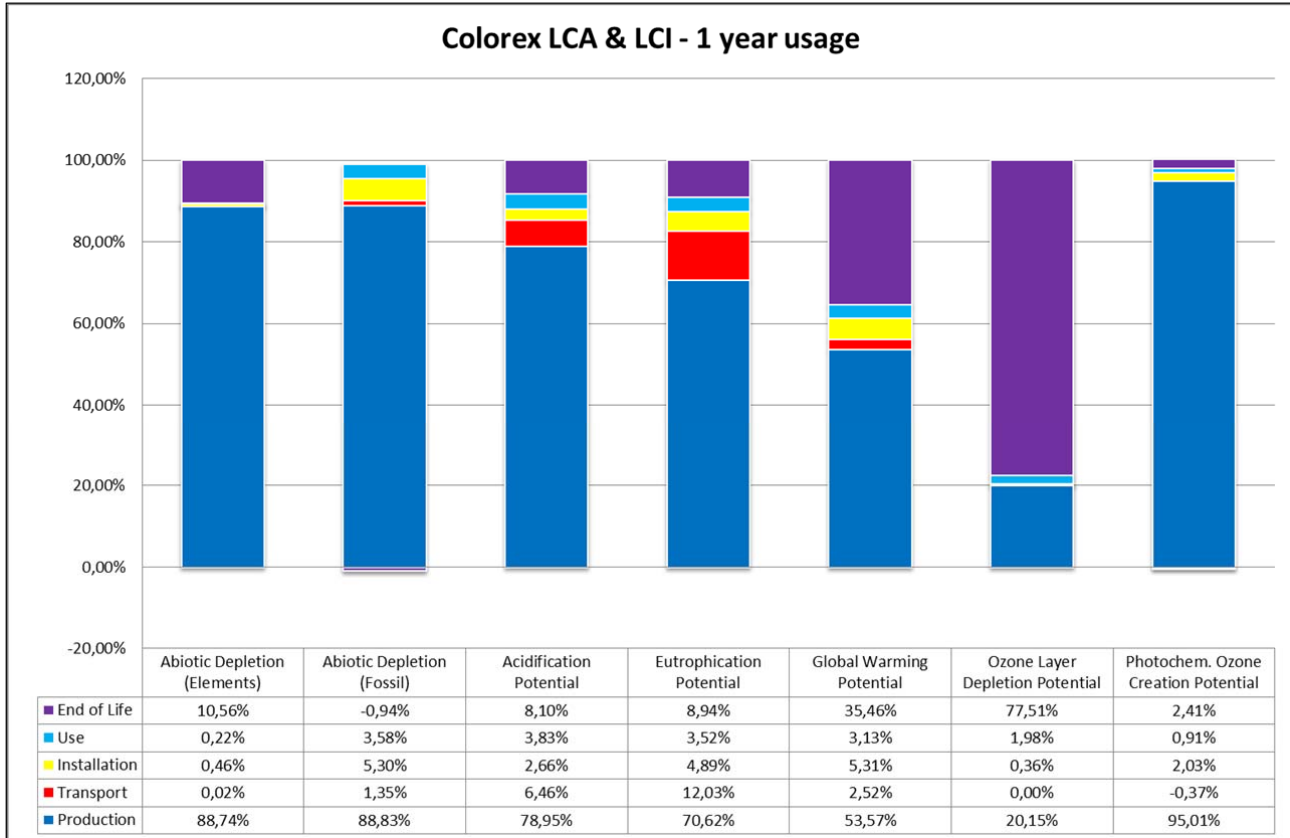

Interpretation

The interpretation of the results has been carried out considering the assumptions and limitations declared in the EPD, both methodology- and data-related for a one year usage.

In most of the impact categories (ADPE, ADPF, AP, EP, GWP and POCP) the production stage has the main contribution to the overall impact. The raw material supply is the key contributor for ADPE, ADPF, AP, EP and GWP with a share of 82 – 99% of the total impact of the production stage. For POCP the Forbo manufacturing is contributing more with a share of 56%, mainly caused by the used energy for the production of Colorex.

Although Forbo declares in the EPD a worldwide distribution by truck (700km) and container ship (1250 km) the transport stage has a very small effect on most of the impacts. Only AP and EP have a significant share which is mainly due to the ocean ship used for transporting the material overseas.

For AP, EP, GWP, POCP, and ADPF the adhesive as main contributor for the flooring installation has a minor impact of 2 - 5% of the total environmental impact of Colorex.

In the Use stage ADPF, AP, EP and GWP have a share between 3 to 4% of the total impacts. This is mainly caused by the electricity needed to vacuum the floor. The cleaning regime used in the calculations is a worst case scenario which will be in practice almost always be lower.

Energy recovery from incineration and the respective energy substitution at the end of life results in a small credit for ADPF in the End of Life stage. For AP, EP and ADPE the End of Life stage has an impact of 7 – 10% of the total. This is mainly due to the fact that 60% of the waste at the End of Life stage is considered as being incinerated.





FLOORING SYSTEMS

Colorex SD / EC 2.0 mm
Conductive Homogeneous Vinyl Floor Covering

According to ISO 14025 & EN 15804

For GWP and in particular ODP the End of Life stage has got a high influence on the total impacts of these impact categories. Also for these two categories this is caused by the incineration of 60% of the waste at the End of Life stage.

Additional Environmental Information

To be fully transparent Forbo Flooring does not only want to declare the environmental impacts required in the PCR, but also the impacts on human health and eco-toxicity. Furthermore the outcome of the calculations according to the European Standard EN15804 are published in this section.

Toxicity

For this calculations the USEtox™ model is used as being the globally recommended preferred model for characterization modeling of human and eco-toxic impacts in LCIA by the United Nations Environment Programme SETAC Life Cycle Initiative.

According to the "ILCD Handbook: Recommendations for Life Cycle Impact Assessment in the European context" the recommended characterization models and associated characterization factors are classified according to their quality into three levels:

- Level I (recommended and satisfactory),
- Level II (recommended but in need of some improvements)
- Level III (recommended, but to be applied with caution).

A mixed classification sometimes is related to the application of the classified method to different types of substances. USEtox™ is classified as Level II / III, unlike for example the CML impact categories which are classified as Level I.

Table 11: Results of the LCA – Environmental impacts one lifecycle (one year) – Colorex

Impact Category : USEtox	Colorex	Unit
Eco toxicity	7.54E-01	PAF m3.day
Human toxicity, cancer	4.15E-09	Cases
Human toxicity, non-canc.	1.24E-06	Cases

In the following table the impacts are subdivided into the lifecycle stages.

Table 12: Results of the LCA – Environmental impact for Colorex (one year)

Impact Category : USEtox	Unit	Production	Transport	Installation	Use (1yr)	End of Life
Eco toxicity	PAF m3.day	7.05E-01	1.37E-02	8.61E-03	2.78E-02	-1.09E-03
Human toxicity, cancer	cases	3.66E-09	5.66E-11	1.64E-10	2.66E-10	1.89E-12
Human toxicity, non-canc.	cases	1.16E-06	2.57E-08	1.15E-08	5.50E-08	-7.67E-09

Interpretation

The interpretation of the results has been carried out considering the assumptions and limitations declared in the EPD, both methodology- and data-related for a one year usage.

All the impacts are predominated by the production stage in which the raw materials are having a big impact with a share of around 98%. The main contributors to this are PVC, stabilizer and Titanium dioxide.

Although Forbo declares in the EPD a worldwide distribution by truck (700km) and container ship (1250 km) the transport stage has a very small effect of 1 – 2 % on the total impacts.

In the installation stage the Human toxicity (cancer) is having an impact of 4%, the other two categories have an impact around 1%. This is for 96 – 98% caused by the adhesive used to install the floor.

The Use stage has got a share on the total impacts of 4 – 6.5%, this is mainly caused by the electricity used to vacuum the floor. The cleaning regime used in the calculations is a worst case scenario which will be in practice almost always be lower.



ENVIRONMENTAL PRODUCT DECLARATION



FLOORING SYSTEMS

Colorex SD / EC 2.0 mm
Conductive Homogeneous Vinyl Floor Covering

According to ISO 14025 & EN 15804

The incineration of 60% of the waste in the End of Life stage is having a negligible impact on these impact categories.

EN15804 results

In this section the calculations have been conducted according to the requirements of the European Standard EN 158024 following the document "Part A: Calculation Rules for the Life Cycle Assessment and Requirements on the Background Report".

Table 13: Results of the LCA – Environmental impact for Colorex (one year)

Parameter	Unit	Manufacturing			Installation		Use (1yr)		End of Life			Credits	
		A1-3	A4	A5	B2	C2	C3	C4	D				
GWP	[kg CO ₂ -Equiv.]	5.50E+00	2.59E-01	6.57E-01	3.22E-01	8.52E-02	3.30E+00	2.58E-01	-1.12E-01				
ODP	[kg CFC11-Equiv.]	2.34E-08	2.29E-12	4.63E-10	2.30E-09	1.78E-12	8.57E-08	4.26E-09	-4.22E-11				
AP	[kg SO ₂ -Equiv.]	2.77E-02	2.27E-03	1.20E-03	1.35E-03	4.28E-04	2.30E-03	1.16E-04	-2.68E-04				
EP	[kg PO ₄ ³⁻ -Equiv.]	1.66E-03	2.83E-04	1.33E-04	8.29E-05	1.03E-04	8.34E-05	2.41E-05	-1.83E-05				
POCP	[kg Ethen Equiv.]	9.56E-03	-3.70E-05	2.27E-04	9.17E-05	4.56E-05	1.28E-04	6.94E-05	-2.22E-05				
ADPE	[kg Sb Equiv.]	2.55E-05	6.41E-09	1.41E-07	6.36E-08	3.92E-09	3.03E-06	-1.94E-09	-8.80E-09				
ADPF	[MJ]	1.43E+02	2.19E+00	1.04E+01	5.78E+00	1.17E+00	-2.89E+00	2.12E-01	-1.89E+00				

GWP = Global warming potential; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential of land and water; EP = Eutrophication potential; POCP = Formation potential of tropospheric ozone photochemical oxidants; ADPE = Abiotic depletion potential for non fossil resources; ADPF = Abiotic depletion potential for fossil resources

Table 14: Results of the LCA – Resource use for Colorex (one year)

Parameter	Unit	Manufacturing			Installation		Use (1yr)		End of Life			Credits	
		A1-3	A4	A5	B2	C2	C3	C4	D				
PERE	[MJ]	-	-	-	-	-	-	-	-				
PERM	[MJ]	-	-	-	-	-	-	-	-				
PERT	[MJ]	2.37E+01	5.77E-02	2.08E-01	7.88E-01	6.91E-02	-2.28E-01	-3.63E-02	-1.37E-01				
PENRE	[MJ]	-	-	-	-	-	-	-	-				
PENRM	[MJ]	-	-	-	-	-	-	-	-				
PENRT	[MJ]	1.44E+02	2.19E+00	1.04E+01	5.84E+00	1.17E+00	-2.50E+00	2.42E-01	-1.89E+00				
SM	[kg]	6.49E-02	-	-	-	-	-	-	-				
RSF	[MJ]	4.24E-03	1.35E-05	2.35E-04	9.54E-05	8.68E-06	-1.72E-04	-8.18E-06	-2.64E-05				
NRSF	[MJ]	4.44E-02	1.41E-04	2.45E-03	9.99E-04	9.07E-05	-1.80E-03	-8.57E-05	-2.76E-04				
FW	[kg]	4.98E+01	7.85E-02	2.53E+00	5.28E+00	6.66E-02	-2.57E+00	-9.33E-01	-3.86E-01				

PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy resources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Use of net fresh water

Table 15: Results of the LCA – Output flows and Waste categories for Colorex (one year)

Parameter	Unit	Manufacturing			Transport		Installation		Use (1yr)		End of Life/credits		
		A1-3	A4	A5	B2	C2	C3	C4	D				
HWD	[kg]	2.36E-03	0.00E+00	3.03E-03	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00				
NHWD	[kg]	1.01E+01	6.81E-03	4.24E-01	1.12E+00	7.22E-03	1.26E+00	-2.93E-02	-1.87E-01				
RWD	[kg]	3.85E-03	2.98E-06	1.29E-04	7.12E-04	1.67E-06	2.85E-04	3.95E-05	1.21E-04				
CRU	[kg]	-	-	-	-	-	-	-	-				
MFR	[kg]	-	-	-	-	-	-	-	-				
MER	[kg]	-	-	-	-	-	3.38E+00	-	-				
EE Power	[MJ]	-	-	1.15E-03	-	-	1.52E+00	-	-				
EE Thermal energy	[MJ]	-	-	0.00E+00	-	-	1.22E+01	-	-				

HWD = Hazardous waste disposed; NHWD = Non-hazardous waste disposed; RWD = Radioactive waste disposed; CRU = Components for re-use; MFR = Materials for recycling; MER = Materials for energy recovery; EE = Exported energy per energy carrier

Interpretation

The interpretation of the environmental impacts calculated according to EN 15804 are similar to the interpretation according to ISO 14025. A more detailed interpretation for a one year usage is presented in following figures and tables.





FLOORING SYSTEMS

Colorex SD / EC 2.0 mm
Conductive Homogeneous Vinyl Floor Covering

According to ISO 14025 & EN 15804

Figure 4: relative contribution of each process stage to each impact category for Colorex for a one year usage.

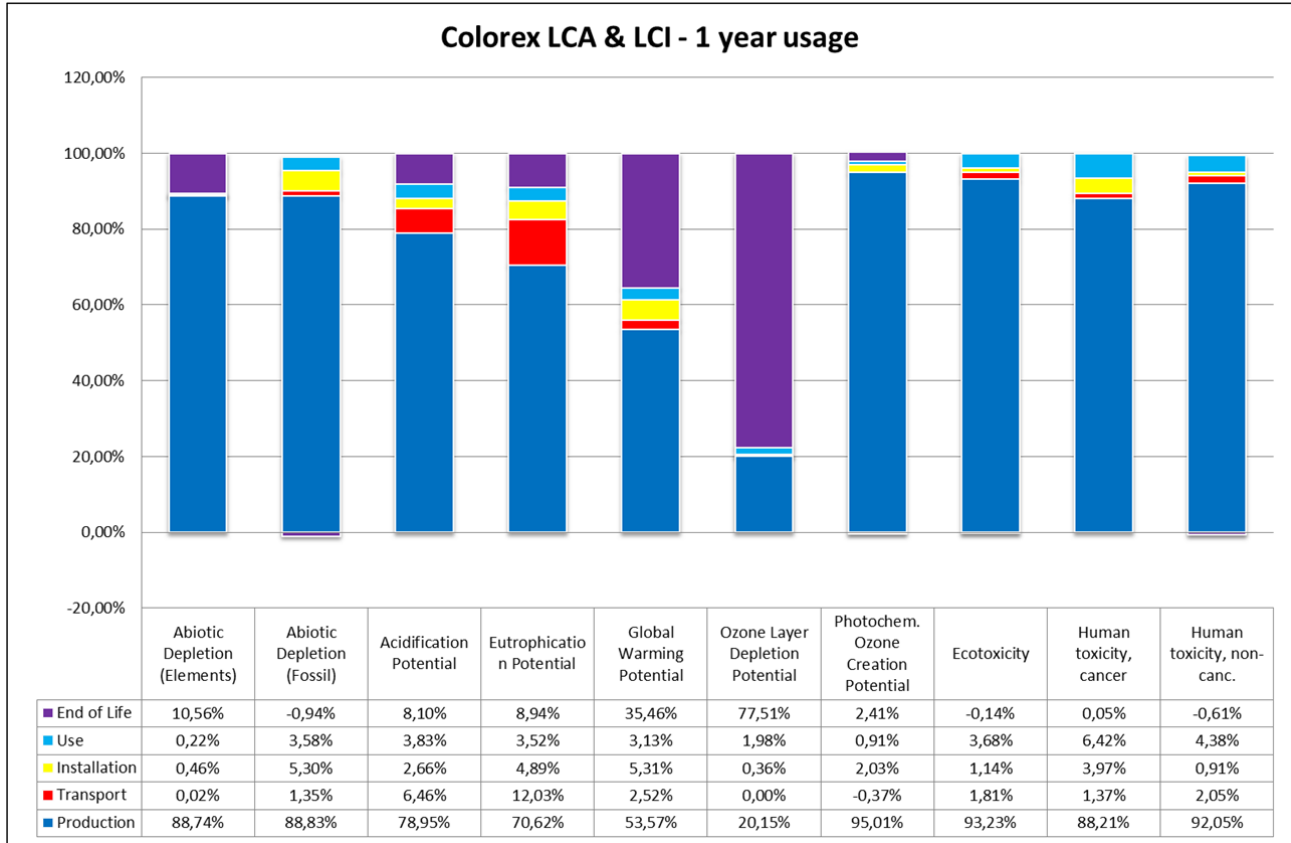


Table 16: Main modules and flows contributing to the total impact in each impact category for Colorex for a one year usage

Impact Category	Stage	Module	Main contributor	Main contributing flows
GWP	Production	Raw Material Extraction	5.44 kg CO ₂ -equiv. DINP (1.51 kg CO ₂ -eq.) PVC (3.28 kg CO ₂ -eq.)	Production : Inorganic emissions to air, Carbon dioxide
		Transport of Raw materials	0.022 kg CO ₂ -equiv. Means of transport (truck, container ship) and their fuels	
		Manufacturing	0.035 kg CO ₂ -equiv. 82% Thermal energy & electricity	
	Transport	Transport Gate to User	Means of transport (truck, container ship) and their fuels	Transport & Installation : Inorganic emissions to air, Carbon dioxide
	Installation	Installation	38% Disposal/recycling of packaging 61% Adhesive	
	Use	Use	82% Electricity 18% Detergent	Use : Inorganic emissions to air, Carbon dioxide
	EOL	EOL	Incineration and land filling of post-consumer Colorex Energy substitution from incineration	EOL : Inorganic emissions to air, Carbon dioxide
ODP	Production	Raw Material Extraction	82% 13% DINP 38% Carbon black 32% Titanium dioxide	Production : Halogenated organic emissions to air, R11 (trichlorofluoromethane), R114 (Dichlorotetrafluorethane), Halon (1301)
		Transport of Raw materials	< 0.01% Means of transport (truck, container ship) and their fuels	
		Manufacturing	18% 98% Paper and cardboard	



ENVIRONMENTAL PRODUCT DECLARATION



FLOORING SYSTEMS

Colorex SD / EC 2.0 mm
Conductive Homogeneous Vinyl Floor Covering

According to ISO 14025 & EN 15804

Impact Category	Stage	Module		Main contributor	Main contributing flows
				packaging	
	Transport	Transport Gate to User		Means of transport (truck, container ship) and their fuels	Transport & Installation : Halogenated organic emissions to air, R11 (trichlorofluoromethane), R114 (Dichlorotetrafluorethane), Halon (1301)
	Installation	Installation		87% Adhesive	
	Use	Use		10% Electricity 90% Detergent	Use : Halogenated organic emissions to air, R11 (trichlorofluoromethane), R114 (Dichlorotetrafluorethane)
EOL	EOL		Incineration and land filling of post-consumer Colorex Energy substitution from incineration	EOL: Halogenated organic emissions to air, R11 (trichlorofluoromethane), R114 (Dichlorotetrafluorethane), Halon (1301)	
AP	Production	Raw Material Extraction	99%	24% PVC 10% DINP 58% Titanium dioxide	Production : Inorganic emissions to air, NO _x and Sulphur dioxide, Ammonia Production : Inorganic emissions to fresh water, Hydrogen chloride
		Transport of Raw materials	<0.5%	Means of transport (truck, container ship) and their fuels	
		Manufacturing	1%	90% Paper and cardboard packaging	
	Transport	Transport Gate to User		Means of transport (truck, container ship) and their fuels	Transport & Installation : Inorganic emissions to air, NO _x , Sulphur dioxide
	Installation	Installation		95% Adhesive	
	Use	Use		93% Electricity 7% Detergent	Use : Inorganic emissions to air, NO _x and Sulphur dioxide
EOL	EOL		Incineration and land filling of post-consumer Colorex Energy substitution from incineration	EOL : Inorganic emissions to air, Hydrogen chloride, NO _x and Sulphur dioxide	
EP	Production	Raw Material Extraction	97%	17% DINP 48% PVC 23% Stabilizer	Production : Inorganic emissions to air, Ammonia, NO _x Production : Inorganic emissions to fresh water, Nitrate
		Transport of Raw materials	1%	Means of transport (truck, container ship) and their fuels	
		Manufacturing	2%	91% Paper and cardboard packaging	
	Transport	Transport Gate to User		Means of transport (truck, container ship) and their fuels	Transport & Installation : Inorganic emissions to air, NO _x
	Installation	Installation		92% Adhesive	
	Use	Use		80% Electricity 20% Detergent	Use : Inorganic emissions to air, NO _x Use : Inorganic emissions to fresh water, Ammonium / ammonia, Nitrate
EOL	EOL		Incineration and land filling of post-consumer Colorex Energy substitution from incineration	EOL : Inorganic emissions to air, NO _x and Ammonia	
POCP	Production	Raw Material Extraction	44%	52% PVC 32% DINP 14% Titanium dioxide	Production : Inorganic emissions to air, Carbon monoxide, NO _x , Sulphur dioxide Production : Halogenated organic emissions to air, Butane (n-butane), NMVOC (Unspecified), VOC (Unspecified)
		Transport of Raw materials	< 0.2%	Means of transport (truck, container ship) and their fuels	
		Manufacturing	56%	99% Thermal energy & electricity	
	Transport	Transport Gate to User		Means of transport (truck, container ship) and their fuels	Transport & Installation : Inorganic emissions to air, Carbon monoxide, NO _x , Sulphur dioxide Transport & Installation : Halogenated organic emissions to air, NMVOC (Unspecified),
	Installation	Installation		97% Adhesive	
	Use	Use		81% electricity 19% Detergent	Use : Inorganic emissions to air, Sulphur dioxide, Nitrogen dioxide
EOL	EOL		Incineration and land filling of post-consumer Colorex Energy substitution from incineration	EOL : Inorganic emissions to air, Carbon monoxide, NO _x , Sulphur dioxide EOL : Organic emissions to air (Group VOC), NMVOC (Unspecified)	
ADPe	Production	Raw Material Extraction	97%	55% PVC 38% Stabilizer	Production : Nonrenewable resources, Colemanite ore, Sodium chloride (Rock salt) Production : Nonrenewable elements, Lead
		Transport of Raw materials	<0,01%	Means of transport (truck, container ship) and their fuels	
		Manufacturing	3%	98% Electricity	

Environment



ENVIRONMENTAL PRODUCT DECLARATION



FLOORING SYSTEMS

Colorex SD / EC 2.0 mm
Conductive Homogeneous Vinyl Floor Covering

According to ISO 14025 & EN 15804

Impact Category	Stage	Module		Main contributor	Main contributing flows
	Transport	Transport Gate to User		Means of transport (truck, container ship) and their fuels	Transport & Installation : Nonrenewable resources, Sodium chloride (rock salt), Magnesium chloride leach (40%)
	Installation	Installation		16% Adhesive 81% Disposal of PVC installation waste	
	Use	Use		57% Electricity 43% Detergent	Use : Nonrenewable resources, Sodium chloride (Rock salt) Use : Nonrenewable elements, Chromium, Copper, Gold, Lead, Molybdenum
	EOL	EOL		Incineration and land filling of post-consumer Colorex Energy substitution from incineration	EOL : Nonrenewable resources, Magnesium chloride leach (40%)
ADPf	Production	Raw Material Extraction	99%	60% PVC 30% DINP	Production : Crude oil resource, Crude oil (in MJ) Production : Natural gas (resource), Natural gas (in MJ)
		Transport of Raw materials	<0.3%	Means of transport (truck, container ship) and their fuels	
		Manufacturing	1%	93% Paper and cardboard packaging	
	Transport	Transport Gate to User		Means of transport (truck, container ship) and their fuels	Transport & Installation : Crude oil (resource) Transport & Installation : Natural gas (resource)
	Installation	Installation		98% Adhesive	
	Use	Use		81% electricity 19% Detergent	Use : Hard coal (resource), Natural gas (resource), Uranium (resource)
	EOL	EOL		Incineration and land filling of post-consumer Colorex Energy substitution from incineration	EOL : Natural gas (resource) EOL : Crude oil (resource)
Eco toxicity	Production	Raw Material Extraction	98%	16% PVC 72% Stabilizer	Production : Heavy metals to agricultural soil, Copper (+II), Zinc (+II) Production : Heavy metals to fresh water, Copper (+II), Zinc (+II), Nickel (+II)
		Transport of Raw materials	1%	Means of transport (truck, container ship) and their fuels	
		Manufacturing	1%	89% Paper and cardboard packaging	
	Transport	Transport Gate to User		Means of transport (truck, container ship) and their fuels	Transport & installation : Heavy metals to fresh water, Copper (+II), Nickel (+II), Zinc (+II) Transport & installation : Heavy metals to agricultural soil, Zinc (+II), Copper (+II)
	Installation	Installation		71% Adhesive	
	Use	Use		7% Detergent 93% Electricity	Use : Heavy metals to air, Zinc (+II) Use : Heavy metals to agricultural soil, Copper (+II), Zinc (+II)
	EOL	EOL		Incineration and land filling of post-consumer Colorex Energy substitution from incineration	EOL : Heavy metals to fresh water, Copper (+II), Cadmium (+II) EOL : Heavy metals to agricultural soil, Copper (+II), Zinc (+II)
Human toxicity, cancer	Production	Raw Material Extraction	99%	35% PVC 9% Titanium dioxide 44% Stabilizer	Production : Heavy metals to agricultural soil, Lead (+II), Mercury (+II) Production : Heavy metals to air, Mercury (+II) Production : Halogenated organic emissions to air, Vinyl chloride (VCM; chloroethene), Formaldehyde (methanal) Production : Heavy metals to fresh water, Chromium (+VI)
		Transport of Raw materials	0.5%	Means of transport (truck, container ship) and their fuels	
		Manufacturing	0.5%	83% Paper and cardboard packaging	
	Transport	Transport Gate to User		Means of transport (truck, container ship) and their fuels	Transport & Installation : Heavy metals to air, Mercury (+II) Transport & Installation : Heavy metals to fresh water, Chromium (+VI), Nickel (+II)
	Installation	Installation		74% adhesive 15% Disposal of PVC installation waste	
	Use	Use		85% Electricity 15% Detergent	Use : Heavy metals to air, Mercury (+II) Use : Heavy metals to fresh water, Chromium (+VI) Use : Heavy metals to agricultural soil, Mercury (+II)
	EOL	EOL		Incineration and land filling of post-consumer Colorex Energy substitution from	EOL : Heavy metals to air, Mercury (+II) EOL : Heavy metals to agricultural soil, Mercury (+II)

Environment





FLOORING SYSTEMS

Colorex SD / EC 2.0 mm
Conductive Homogeneous Vinyl Floor Covering

According to ISO 14025 & EN 15804

Impact Category	Stage	Module		Main contributor	Main contributing flows
				incineration	
Human toxicity, non canc.	Production	Raw Material Extraction	99%	87% Stabilizer	Production : Heavy metals to agricultural soil, Zinc (+II), Lead (+II), Mercury (+II)
		Transport of Raw materials	0.5%	Means of transport (truck, container ship) and their fuels	
		Manufacturing	0.5%	80% Paper and cardboard packaging	
	Transport	Transport Gate to User		Means of transport (truck, container ship) and their fuels	Transport & Installation : Heavy metals to air, Mercury (+II)
	Installation	Installation		96% adhesive	Transport & Installation : Heavy metals to agricultural soil, Lead (+II), Mercury (+II), Zinc (+II)
	Use	Use		99% electricity	Use : Heavy metals to air, Mercury (+II), Zinc (+II) Use : Heavy metals to agricultural soil, Mercury (+II), Zinc (+II)
EOL	EOL		Incineration and land filling of post-consumer Colorex Energy substitution from incineration	EOL : Heavy metals to agricultural soil, Lead (+II), Mercury (+II), Zinc (+II) EOL : Heavy metals to air, Mercury (+II)	

Description of Selected Impact Categories

Abiotic Depletion Potential

The abiotic depletion potential covers all natural resources such as metal containing ores, crude oil and mineral raw materials. Abiotic resources include all raw materials from non-living resources that are non-renewable. This impact category describes the reduction of the global amount of non-renewable raw materials. Non-renewable means a time frame of at least 500 years. This impact category covers an evaluation of the availability of natural elements in general, as well as the availability of fossil energy carriers.

ADP (elements) describes the quantity of non-energetic resources directly withdrawn from the geosphere. It reflects the scarcity of the materials in the geosphere and is expressed in Antimony equivalents. The characterization factors are published by the CML, Oers 2010.

Are fossil energy carriers included in the impact category, it is ADP (fossil). Fossil fuels are used similarly to the primary energy consumption; the unit is therefore also MJ. In contrast to the primary fossil energy ADP fossil does not contain uranium, because this does not count as a fossil fuel.

Primary energy consumption

Primary energy demand is often difficult to determine due to the various types of energy source. Primary energy demand is the quantity of energy directly withdrawn from the hydrosphere, atmosphere or geosphere or energy source without any anthropogenic change. For fossil fuels and uranium, this would be the amount of resource withdrawn expressed in its energy equivalent (i.e. the energy content of the raw material). For renewable resources, the energy-characterized amount of biomass consumed would be described. For hydropower, it would be based on the amount of energy that is gained from the change in the potential energy of water (i.e. from the height difference). As aggregated values, the following primary energies are designated:

The total **“Primary energy consumption non-renewable”**, given in MJ, essentially characterizes the gain from the energy sources natural gas, crude oil, lignite, coal and uranium. Natural gas and crude oil will both be used for energy production and as material constituents e.g. in plastics. Coal will primarily be used for energy production. Uranium will only be used for electricity production in nuclear power stations.

The total **“Primary energy consumption renewable”**, given in MJ, is generally accounted separately and comprises hydropower, wind power, solar energy and biomass. It is important that the end energy (e.g. 1 kWh of electricity) and the primary energy used are not miscalculated with each other; otherwise the efficiency for production or supply of the end energy will not be accounted for. The energy content of the manufactured products will be considered as feedstock energy content. It will be characterized by the net calorific value of the product. It represents the still usable energy content.



Waste categories

There are various different qualities of waste. For example, waste can be classed according to German and European waste directives. The modeling principles have changed with the last GaBi4 database update in October 2006. Now all LCA data sets (electricity generation, raw material etc.) already contain the treatment of the waste with very low waste output at the end of the stage. So the amount of waste is predominantly caused by foreground processes during the production phase. This is important for the interpretation of waste amounts.

From a balancing point of view, it makes sense to divide waste into three categories. The categories overburden/tailings, industrial waste for municipal disposal and hazardous waste will be used.

Overburden / tailings in kg: This category consists of the layer which must be removed in order to access raw material extraction, ash and other raw material extraction conditional materials for disposal. Also included in this category are tailings such as inert rock, slag, red mud etc.

Industrial waste for municipal disposal in kg: This term contains the aggregated values of industrial waste for municipal waste according to 3. AbfVwV TA SiedlABf.

Hazardous waste in kg: This category includes materials that will be treated in a hazardous waste incinerator or hazardous waste landfill, such as painting sludge's, galvanic sludge's, filter dusts or other solid or liquid hazardous waste and radioactive waste from the operation of nuclear power plants and fuel rod production.

Global Warming Potential (GWP)

The mechanism of the greenhouse effect can be observed on a small scale, as the name suggests, in a greenhouse. These effects are also occurring on a global scale. The occurring short-wave radiation from the sun comes into contact with the earth's surface and is partly absorbed (leading to direct warming) and partly reflected as infrared radiation. The reflected part is absorbed by so-called greenhouse gases in the troposphere and is re-radiated in all directions, including back to earth. This results in a warming effect on the earth's surface.

In addition to the natural mechanism, the greenhouse effect is enhanced by human activities. Greenhouse gases that are considered to be caused, or increased, anthropogenically are, for example, carbon dioxide, methane and CFCs.

Figure A1 shows the main processes of the anthropogenic greenhouse effect. An analysis of the greenhouse effect should consider the possible long term global effects.

The global warming potential is calculated in carbon dioxide equivalents (CO₂-Eq.). This means that the greenhouse potential of an emission is given in relation to CO₂. Since the residence time of the gases in the atmosphere is incorporated into the calculation, a time range for the assessment must also be specified. A period of 100 years is customary.

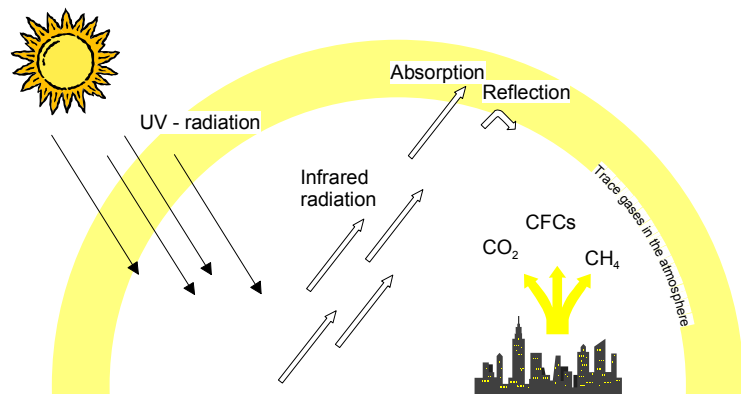


Figure A1: Greenhouse effect (KREISSIG 1999)

Acidification Potential (AP)

The acidification of soils and waters predominantly occurs through the transformation of air pollutants into acids. This leads to a decrease in the pH-value of rainwater and fog from 5.6 to 4 and below. Sulphur dioxide and nitrogen oxide and their respective acids (H₂SO₄ and HNO₃) produce relevant contributions. This damages ecosystems, whereby forest dieback is the most well-known impact.

Acidification has direct and indirect damaging effects (such as nutrients being elutriated from soils or an increased solubility of metals into soils). But even buildings and building materials can be damaged. Examples include metals

and natural stones which are corroded or disintegrated at an increased rate.

When analyzing acidification, it should be considered that although it is a global problem, the regional effects of acidification can vary. *Figure A2* displays the primary impact pathways of acidification.

The acidification potential is given in sulphur dioxide equivalents (SO₂-Eq.). The acidification potential is described as the ability of certain substances to build and release H⁺ - ions. Certain emissions can also be considered to have an acidification potential, if the given S-, N- and halogen atoms are set in proportion to the molecular mass of the emission. The reference substance is sulphur dioxide.

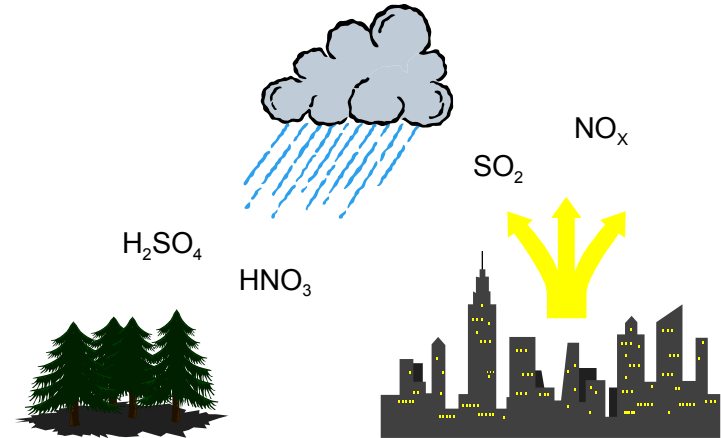


Figure A2: Acidification Potential (KREISSIG 1999)

Eutrophication Potential (EP)

Eutrophication is the enrichment of nutrients in a certain place. Eutrophication can be aquatic or terrestrial. Air pollutants, waste water and fertilization in agriculture all contribute to eutrophication.

The result in water is an accelerated algae growth, which in turn, prevents sunlight from reaching the lower depths. This leads to a decrease in photosynthesis and less oxygen production. In addition, oxygen is needed for the decomposition of dead algae. Both effects cause a decreased oxygen concentration in the water, which can eventually lead to fish dying and to anaerobic decomposition (decomposition without the presence of oxygen). Hydrogen sulphide and methane are thereby produced. This can lead, among others, to the destruction of the ecosystem.

On eutrophicated soils, an increased susceptibility of plants to diseases and pests is often observed, as is a degradation of plant stability. If the nitrification level exceeds the amounts of nitrogen necessary for a maximum harvest, it can lead to an enrichment of nitrate. This can cause, by means of leaching, increased nitrate content in groundwater. Nitrate also ends up in drinking water.

Nitrate at low levels is harmless from a toxicological point of view. However, nitrite, a reaction product of nitrate, is toxic to humans. The causes of eutrophication are displayed in *Figure A3*. The eutrophication potential is calculated in phosphate equivalents (PO₄-Eq). As with acidification potential, it's important to remember that the effects of eutrophication potential differ regionally.

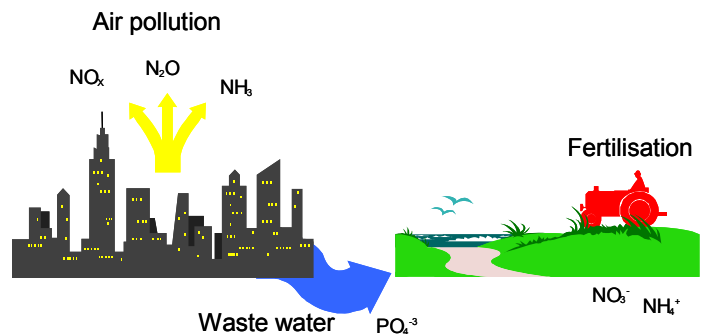


Figure A3: Eutrophication Potential (KREISSIG 1999)

Photochemical Ozone Creation Potential (POCP)

Despite playing a protective role in the stratosphere, at ground-level ozone is classified as a damaging trace gas. Photochemical ozone production in the troposphere, also known as summer smog, is suspected to damage vegetation and material. High concentrations of ozone are toxic to humans.

Radiation from the sun and the presence of nitrogen oxides and hydrocarbons incur complex chemical reactions, producing aggressive reaction products, one of which is ozone. Nitrogen oxides alone do not cause high ozone concentration levels. Hydrocarbon emissions occur from incomplete combustion, in conjunction with petrol (storage, turnover, refueling etc.) or from solvents. High concentrations of ozone arise when the temperature is high, humidity is low, when air is relatively static and when there are high concentrations of hydrocarbons. Today it is assumed that the existence of NO and CO reduces the accumulated ozone to NO₂, CO₂ and O₂. This means, that high concentrations of ozone do not often occur near hydrocarbon emission sources. Higher ozone concentrations more commonly arise in areas of clean air, such as forests, where there is less NO and CO (Figure A4).

In Life Cycle Assessments, photochemical ozone creation potential (POCP) is referred to in ethylene-equivalents (C₂H₄-Äq.). When analyzing, it's important to remember that the actual ozone concentration is strongly influenced by the weather and by the characteristics of the local conditions.

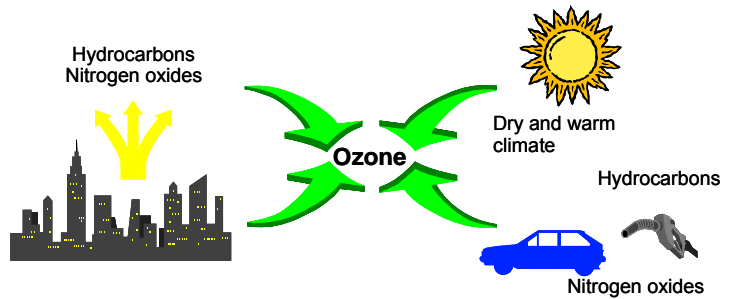


Figure A4: Photochemical Ozone Creation Potential

Ozone Depletion Potential (ODP)

Ozone is created in the stratosphere by the disassociation of oxygen atoms that are exposed to short-wave UV-light. This leads to the formation of the so-called ozone layer in the stratosphere (15 - 50 km high). About 10 % of this ozone reaches the troposphere through mixing processes. In spite of its minimal concentration, the ozone layer is essential for life on earth. Ozone absorbs the short-wave UV-radiation and releases it in longer wavelengths. As a result, only a small part of the UV-radiation reaches the earth.

Anthropogenic emissions deplete ozone. This is well-known from reports on the hole in the ozone layer. The hole is currently confined to the region above Antarctica, however another ozone depletion can be identified, albeit not to the same extent, over the mid-latitudes (e.g. Europe). The substances which have a depleting effect on the ozone can essentially be divided into two groups; the fluorine-chlorine-hydrocarbons (CFCs) and the nitrogen oxides (NOX). Figure A5 depicts the procedure of ozone depletion.

One effect of ozone depletion is the warming of the earth's surface. The sensitivity of humans, animals and plants to UV-B and UV-A radiation is of particular importance. Possible effects are changes in growth or a decrease in harvest crops (disruption of photosynthesis), indications of tumors (skin cancer and eye diseases) and decrease of sea plankton, which would strongly affect the food chain. In calculating the ozone depletion potential, the anthropogenically released halogenated hydrocarbons, which can destroy many ozone molecules, are recorded first. The so-called Ozone Depletion Potential (ODP) results from the calculation of the potential of different ozone relevant substances.



FLOORING SYSTEMS

Colorex SD / EC 2.0 mm
Conductive Homogeneous Vinyl Floor Covering

According to ISO 14025 & EN 15804

This is done by calculating, first of all, a scenario for a fixed quantity of emissions of a CFC reference (CFC 11). This results in an equilibrium state of total ozone reduction. The same scenario is considered for each substance under study whereby CFC 11 is replaced by the quantity of the substance. This leads to the ozone depletion potential for each respective substance, which is given in CFC 11 equivalents. An evaluation of the ozone depletion potential should take the long term, global and partly irreversible effects into consideration.

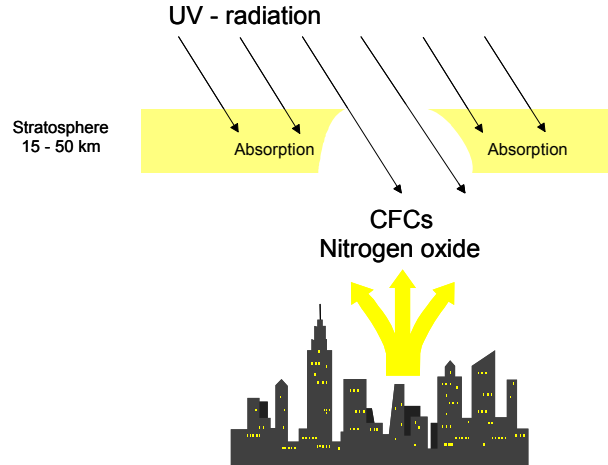


Figure A5:

Ozone Depletion Potential (KREISSIG 1999)





FLOORING SYSTEMS

Colorex SD / EC 2.0 mm
Conductive Homogeneous Vinyl Floor Covering

According to ISO 14025 & EN 15804

References

GABI 5 2012	PE INTERNATIONAL AG; GaBi 5: Software-System and Database for Life Cycle Engineering. Copyright, TM. Stuttgart, Echterdingen, 1992-2012.
GABI 5 2012D	GaBi 5: Documentation of GaBi 5: Software-System and Database for Life Cycle Engineering. Copyright, TM. Stuttgart, Echterdingen, 1992-2012. http://documentation.gabi-software.com/
NSF International May 22, 2012	Product Category Rule for Environmental Product Declarations <i>Flooring: Carpet, Resilient, Laminate, Ceramic, Wood</i>
UL ENVIRONMENT ERFMI 2008	UL Environment's Program Operator Rules Final report: LCA, Environmental Information Sheet and Eco design Model of Resilient Flooring by order of ERFMI, PE International, 2008
IBU 2011	PCR - Part A: Calculation rules for the Life Cycle Assessment and Requirements on the Background Report, Institut Bauen und Umwelt e.V.
PE 2012	Description of Selected Impact Categories, PE International AG, 2012
ILCD Handbook: General guide for Life Cycle Assessment - Detailed guidance	European Commission - Joint Research Centre - Institute for Environment and Sustainability: International Reference Life Cycle Data System (ILCD) Handbook - General guide for Life Cycle Assessment - Detailed guidance. First edition March 2010. EUR 24708 EN. Luxembourg. Publications Office of the European Union; 2010
STANDARDS AND LAWS	
DIN EN ISO 14044	Environmental management - Life cycle assessment - Requirements and guidelines (ISO 14044:2006); German and English version EN ISO 14044
ISO 14025 2006	DIN EN ISO 14025: Environmental labels and declarations — Type III environmental declarations — Principles and procedures
ISO 14040 2006	Environmental management - Life cycle assessment - Principles and framework (ISO 14040); German and English version EN ISO 14040
CEN/TR 15941	Sustainability of construction works - Environmental product declarations - Methodology for selection and use of generic data; German version CEN/TR 15941
EN 15804	EN 15804: Sustainability of construction works — Environmental Product Declarations — Core rules for the product category of construction products
ISO 24011	Resilient floor coverings - Specification for plain and decorative Colorex
CPR	REGULATION (EU) No 305/2011 OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL of 9 March 2011 laying down harmonized conditions for the marketing of construction products and repealing Council Directive 89/106/EEC
EN-ISO 10874	Resilient, textile and laminate floor coverings - Classification

